



Aalto University
School of Electrical
Engineering

Lecture 11: Sensorless Synchronous Motor Drives

ELEC-E8402 Control of Electric Drives and Power Converters

Marko Hinkkanen

Spring 2021

Learning Outcomes

After this lecture and exercises you will be able to:

- ▶ Explain the voltage-model estimator
- ▶ Explain the basic principles of high-frequency signal-injection methods

Rotor-Position Estimation Methods

- ▶ Fundamental-excitation-based methods¹
 - ▶ Rely on the mathematical model of the motor
 - ▶ Voltage model, observers
 - ▶ Sensitive to parameter errors at low speeds
 - ▶ Risk of unstable regions also at high speeds if the gains are not properly chosen
- ▶ High-frequency signal-injection methods^{2,3}
 - ▶ Aim to enable sensorless operation **at very low speeds**
 - ▶ Rely on magnetic saliency, $L_d \neq L_q$ is necessary
 - ▶ Pulsating or rotating excitation signal
 - ▶ Dynamic performance may be poor
 - ▶ Cause additional losses and noise
 - ▶ Often combined with a fundamental-excitation-based method

¹Jones and Lang, "A state observer for the permanent-magnet synchronous motor," *IEEE Trans. Ind. Electron.*, 1989.


²Corley and Lorenz, "Rotor position and velocity estimation for a salient-pole permanent magnet synchronous machine at standstill and high speeds," *IEEE Trans. Ind. Appl.*, 1998.

³Ha, Kang, and Sul, "Position-controlled synchronous reluctance motor without rotational transducer," *IEEE Trans. Ind. Appl.*, 1999.

Speed-Adaptive Observer

Observer With High-Frequency Signal Injection

Typical Sensorless Control System

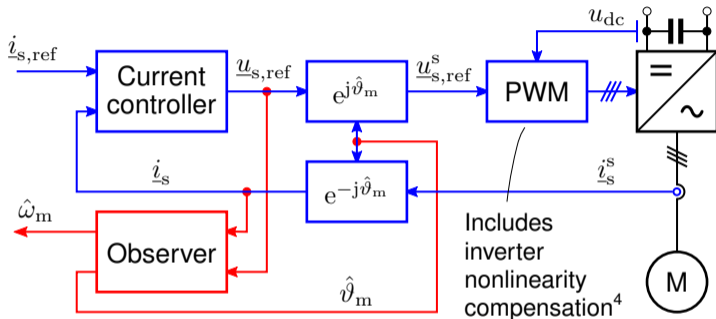

- ▶ Reference calculation remains the same as in sensed drives
- ▶ Observer could alternatively be implemented in stator coordinates

⁴Holtz, "Pulsewidth modulation for electronic power conversion," *Proc. IEEE*, 1994.

Voltage Model in Stator Coordinates

- ▶ Stator flux estimator

$$\frac{d\hat{\underline{\psi}}_s^s}{dt} = \underline{u}_s^s - \hat{R}_s \underline{i}_s^s \quad \Rightarrow$$
$$\hat{\underline{\psi}}_s^s = \int (\underline{u}_s^s - \hat{R}_s \underline{i}_s^s) dt$$

- ▶ Flux estimate

$$\hat{\underline{\psi}}_s^s = \hat{\psi}_\alpha + j\hat{\psi}_\beta = \hat{\psi}_s e^{j\hat{\vartheta}}$$

- ▶ Flux angle estimate

$$\hat{\vartheta} = \text{atan2}(\hat{\psi}_\beta, \hat{\psi}_\alpha)$$

- ▶ Rotor speed in steady state

$$\hat{\omega}_m = \frac{d\hat{\vartheta}}{dt}$$

- ▶ Rotor angle $\hat{\vartheta}_m$ should still be solved from flux equations

Properties of the Voltage Model

- ▶ Estimation-error dynamics are marginally stable (pure integration)
- ▶ Flux estimate will drift away from the origin due to any offsets in measurements
- ▶ Very sensitive to \hat{R}_s and inverter nonlinearities at low speeds
- ▶ Good accuracy at higher speeds despite the parameter errors (but pure integration has been remedied)
- ▶ Can be improved with suitable feedback \Rightarrow observer
- ▶ Can be implemented in estimated rotor coordinates

Real-Time Simulation of Motor Equations

- ▶ State estimator in estimated rotor coordinates

$$\frac{d\hat{\underline{\psi}}_s}{dt} = \underline{u}_s - \hat{R}_s \hat{\underline{i}}_s - j\hat{\omega}_m \hat{\underline{\psi}}_s$$

where the current estimate is

$$\hat{\underline{i}}_s = \hat{i}_d + j\hat{i}_q$$

with the components

$$\hat{i}_d = (\hat{\psi}_d - \hat{\psi}_F) / \hat{L}_d$$

$$\hat{i}_q = \hat{\psi}_q / \hat{L}_q$$

- ▶ Rotor position estimator

$$\frac{d\hat{\vartheta}_m}{dt} = \hat{\omega}_m$$

- ▶ How to obtain the speed estimate?
- ▶ Could we improve this open-loop flux estimator?

Speed-Adaptive Observer

- ▶ State observer

$$\frac{d\hat{\psi}_s}{dt} = \underline{u}_s - \hat{R}_s \hat{i}_s - j\hat{\omega}_m \hat{\psi}_s + \underline{k}_1(i_d - \hat{i}_d) + \underline{k}_2(i_q - \hat{i}_q)$$

where the current estimate is

$$\hat{i}_s = \hat{i}_d + j\hat{i}_q$$

with the components

$$\hat{i}_d = (\hat{\psi}_d - \hat{\psi}_F) / \hat{L}_d$$

$$\hat{i}_q = \hat{\psi}_q / \hat{L}_q$$

- ▶ Rotor position estimator


$$\frac{d\hat{\vartheta}_m}{dt} = \hat{\omega}_m$$

- ▶ Speed estimation

$$\hat{\omega}_m = k_p(i_q - \hat{i}_q) + k_i \int (i_q - \hat{i}_q) dt$$

drives $i_q - \hat{i}_q$ to zero

- ▶ Also the d-component could be used for speed estimation

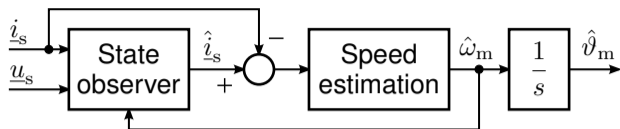


- ▶ Constant observer gains $\underline{k}_1 = g\hat{L}_d$ and $\underline{k}_2 = g\hat{L}_q$ work quite well (typically $g = 2\pi \cdot 15 \dots 30$ rad/s can be chosen)⁵
- ▶ However, interaction between the state observer and the speed estimation may lead to unstable regions⁶
- ▶ Stabilizing observer gains \underline{k}_1 and \underline{k}_2 decouple two subsystems and enable pole placement
- ▶ 6.7-kW SyRM is used as example in the following

⁵Capecchi, Guglielmi, *et al.*, "Position-sensorless control of the transverse-laminated synchronous reluctance motor," *IEEE Trans. Ind. Appl.*, 2001.


⁶Hinkkanen, Saarakkala, *et al.*, "Observers for sensorless synchronous motor drives: Framework for design and analysis," *IEEE Trans. Ind. Appl.*, 2018.

Observer Poles at the Maximum Torque

Constant observer gain⁵

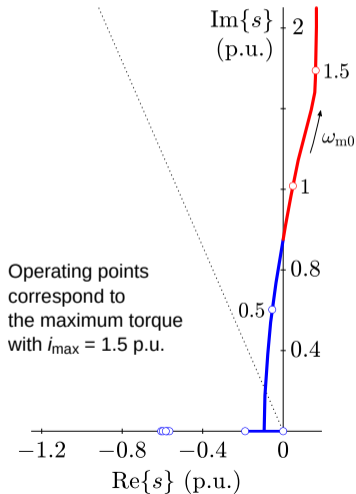


Stabilizing observer gain⁶

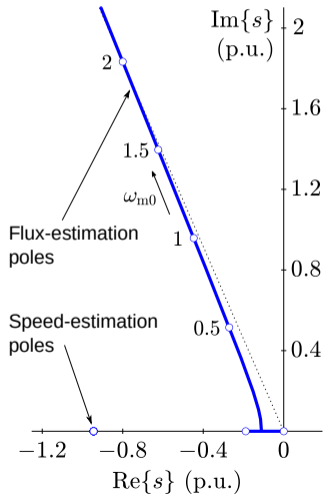


Experimental Results: Acceleration at the Maximum Torque

Constant observer gain⁵

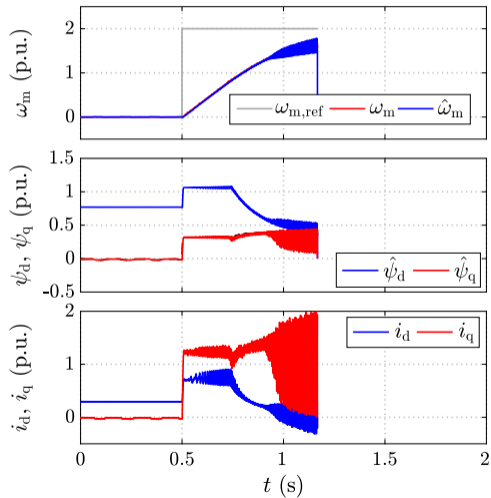


Stabilizing observer gain⁶

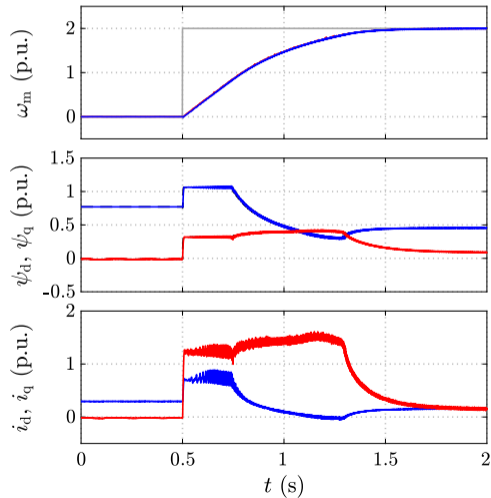

Speed-Adaptive Observer


Observer With High-Frequency Signal Injection

Signal Injection Utilizes the Magnetic Saliency

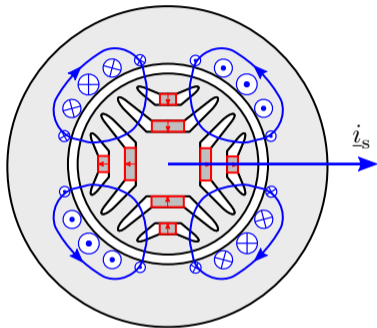

$$\underline{i}_s = i_d + j0$$

$$\underline{\psi}_s = L_d i_d + \psi_F$$

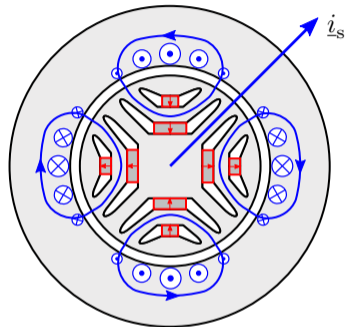


$$\underline{i}_s = 0 + j i_q$$

$$\underline{\psi}_s = j L_q i_q + \psi_F$$

Sensorless Control Augmented With Signal Injection⁷

High-frequency voltage excitation
(typically 0.2...2 kHz,
enabled only
at low speeds)

Error signal
extracted from
the high-frequency
current response

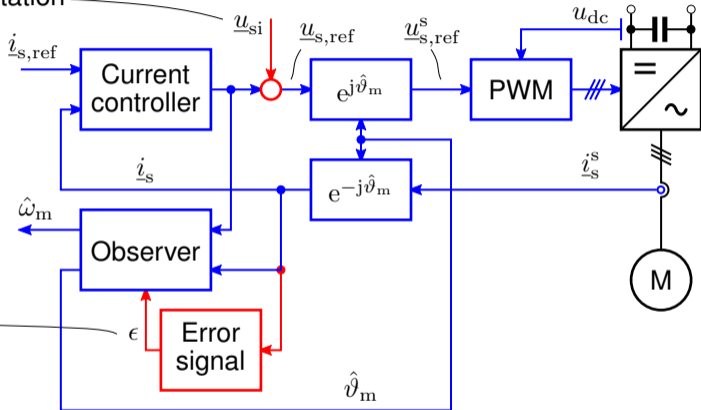

⁷Piippo, Hinkkanen, and Luomi, "Analysis of an adaptive observer for sensorless control of interior permanent magnet synchronous motors," *IEEE Trans. Ind. Appl.*, 2008.

Position Estimation Error


- ▶ Controller operates in estimated rotor coordinates (no superscript)
- ▶ Actual rotor coordinates are marked with the superscript r
- ▶ Some estimation error exists

$$\tilde{\vartheta}_m = \vartheta_m - \hat{\vartheta}_m$$

- ▶ This leads to control errors

$$\underline{i}_s^r = \underline{i}_s e^{-j\tilde{\vartheta}_m}$$

$$\underline{\psi}_s^r = \underline{\psi}_s e^{-j\tilde{\vartheta}_m}$$

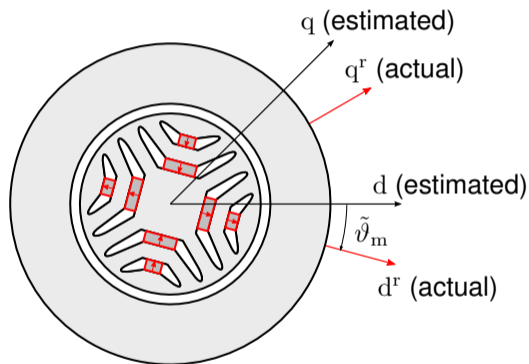

Excitation Voltage and Resulting Current Response

- ▶ Subscript i refers to injected high-frequency signals

- ▶ **High-frequency excitation**

$$\underline{u}_{si} = u_i \cos(\omega_i t)$$

injected on the d-axis

- ▶ Resulting stator flux linkage in estimated rotor coordinates

$$\underline{\psi}_{si} = \int \underline{u}_{si} dt = \frac{u_i}{\omega_i} \sin(\omega_i t)$$

assuming $R_s = 0$ and $\omega_m = 0$

- ▶ Stator flux linkage in rotor coordinates

$$\begin{aligned} \underline{\psi}_{si}^r &= \psi_{di}^r + j\psi_{qi}^r = \underline{\psi}_{si} e^{-j\tilde{\vartheta}_m} \\ &= \frac{u_i}{\omega_i} \sin(\omega_i t) \left(\cos \tilde{\vartheta}_m - j \sin \tilde{\vartheta}_m \right) \end{aligned}$$

- ▶ Resulting high-frequency current response in estimated rotor coordinates

$$\begin{aligned} \underline{i}_{si} &= i_{di} + j i_{qi} = \underline{i}_{si}^r e^{j\tilde{\vartheta}_m} \\ &= \left(\frac{\psi_{di}^r}{L_d} + j \frac{\psi_{qi}^r}{L_q} \right) \left(\cos \tilde{\vartheta}_m + j \sin \tilde{\vartheta}_m \right) \end{aligned}$$

where ψ_{di}^r and ψ_{qi}^r are obtained from the previous equation

- ▶ Component in the estimated q-direction

$$i_{qi} = \frac{u_i}{2\omega_i} \frac{L_q - L_d}{L_d L_q} \sin(\omega_i t) \sin(2\tilde{\vartheta}_m)$$

is an amplitude modulation of the carrier by the envelope $\sin(2\tilde{\vartheta}_m)$

- ▶ Demodulation

$$\begin{aligned} & i_{qi} \sin(\omega_i t) \\ &= \frac{u_i}{4\omega_i} \frac{L_q - L_d}{L_d L_q} [1 - \sin(2\omega_i t)] \sin(2\tilde{\vartheta}_m) \end{aligned}$$

- ▶ Low-pass filtering


$$\begin{aligned} \epsilon &= \text{LPF} \{i_{qi} \sin(\omega_i t)\} \\ &= \frac{u_i}{4\omega_i} \frac{L_q - L_d}{L_d L_q} \sin(2\tilde{\vartheta}_m) \end{aligned}$$

- ▶ Error signal ϵ is roughly proportional to the position estimation error $\tilde{\vartheta}_m$


Observer Augmented With Signal Injection

$$\epsilon = \text{LPF} \{i_q \sin(\omega_i t)\} \approx \frac{u_i}{2\omega_i} \frac{L_q - L_d}{L_d L_q} \tilde{\vartheta}_m$$

Error-signal calculation
(delay and cross-saturation compensations are omitted in the figure for simplicity)




Observer augmented with error signal

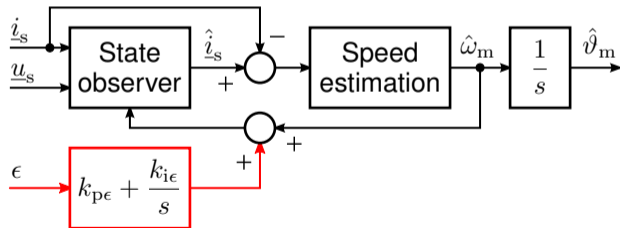

Experimental Results: Torque Steps at Zero Speed⁸

- ▶ 6.7-kW SyRM drive
- ▶ Sustained zero-speed operation (under load torque) possible due to signal injection

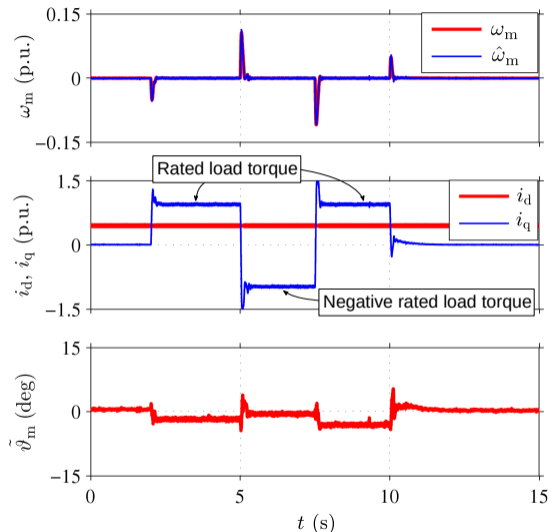

⁸Tuovinen and Hinkkanen, "Adaptive full-order observer with high-frequency signal injection for synchronous reluctance motor drives," *IEEE J. Emerg. Sel. Topics Power Electron.*, 2014.

Sensorless Control: Problems and Properties

- ▶ Sources of errors in the position estimation
 - ▶ Parameter errors: \hat{R}_s is important at low speeds
 - ▶ Accuracy of the stator voltage (inverter nonlinearities)
 - ▶ Cross-saturation causes position error in signal injection
- ▶ Sustained operation at zero speed (under the load torque) is not possible without signal injection
- ▶ Most demanding applications still need a speed or position sensor

Other Control Challenges

- ▶ High saliency ratio and low (or zero) PM flux
- ▶ High stator frequency, increasing sensitivity to
 - ▶ Time delays
 - ▶ Discretization
- ▶ Parameter variations and inaccuracies
 - ▶ Magnetic saturation, core losses
 - ▶ Stator resistance and PM flux (temperature)
 - ▶ Skin effect (in form-wound stator windings)
- ▶ Identification of the motor parameters
 - ▶ Self-commissioning during the drive start-up
 - ▶ Finite-element analysis?
 - ▶ Role of IoT and machine learning in the future?