

CHEM-E0115 Planning and Execution of a Biorefinery Project (5 cr)

Lecture 7: Working at site (commissioning and start-up phase), experiences from site October 27, 2022 Tuomas Turkama

Tuomas Turkama

AFRY Finland Oy Technology Specialist, Paper Process Industries Finland

M.Sc. Paper Technology Helsinki University of Technology





COMMISSIONING & START-UP



The nature of an investment project execution can be like a conquest of mountain




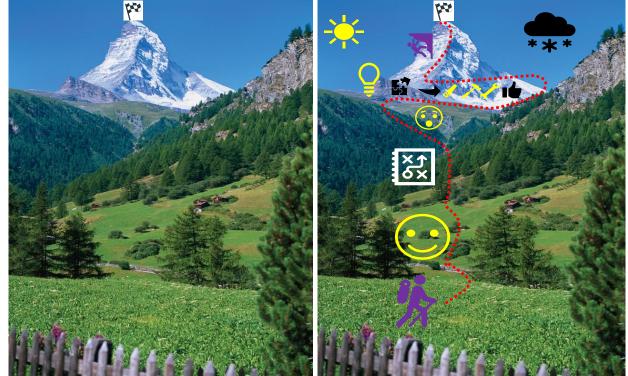




Table of contents

- 1. Commissioning as a part of an investment project
- 2. Preparation tasks for commissioning
- 3. Execution of commissioning
- 4. Examples occurrences during commissioning



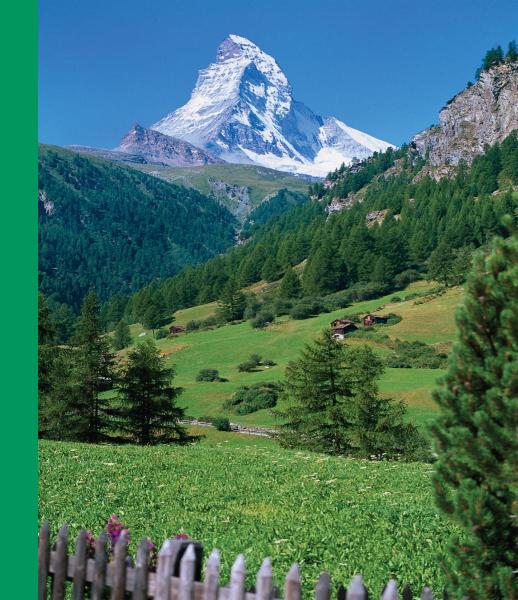

1. Commissioning as a part of an investment project



Commissioning


- <u>Commissioning:</u> Activities after the installation, but before the start-up
- <u>Target:</u> Secure a safe and successful start-up in adherence to the planned schedule




<u>Activities</u>: Check-outs, functional testing, lubrication, water run, internal cleaning and flushing




Project life cycle and Start-up phase

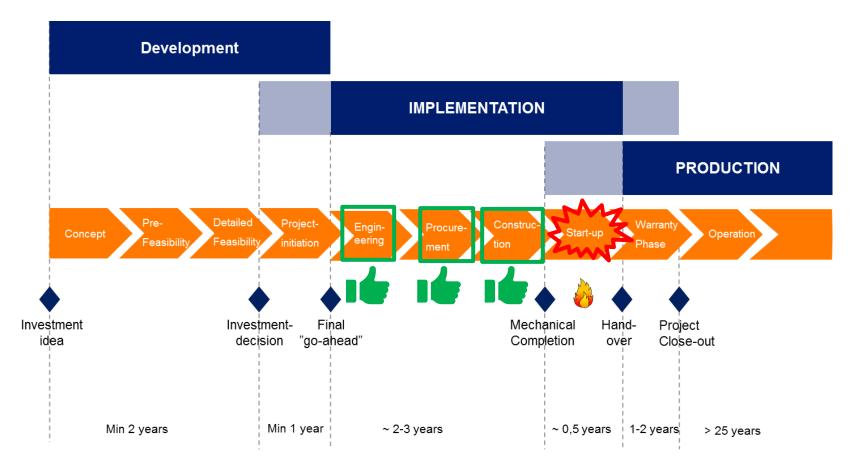





Start-up activities

Model of start-up logic

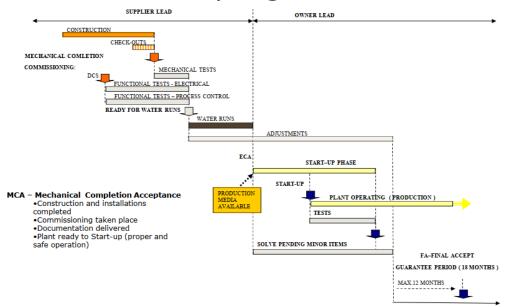




Project life cycle and Start-up phase

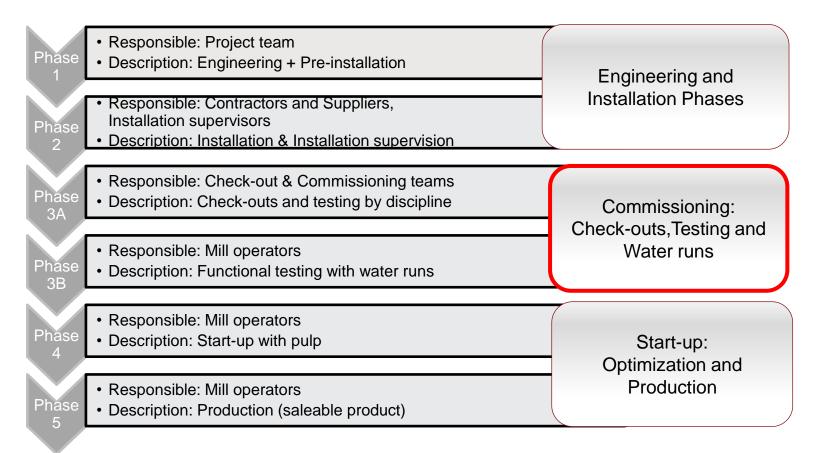



Project Functions

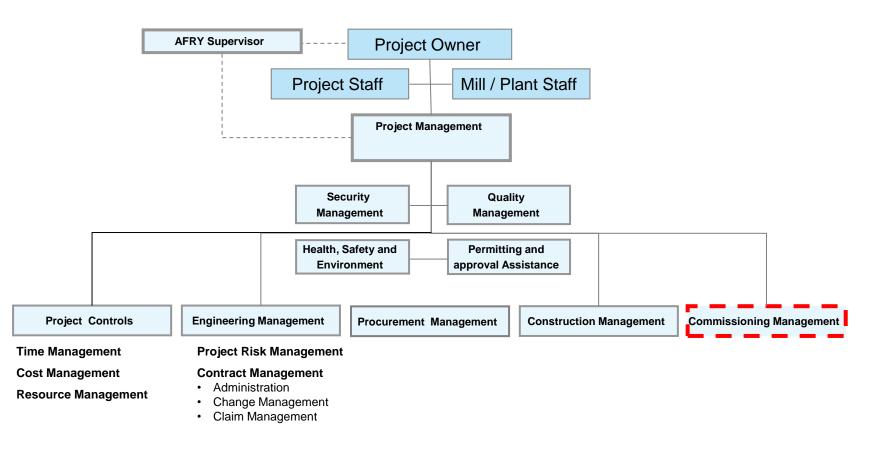

2. Preparation tasks for commissioning



Commissioning preparations

Good preparation of commissioning creates a good chance for a safe and successful start up!







Commissioning preparations



- Outline the contractual responsibilities of the parties involved
- Preparation of commissioning manual
 - ✓ Commissioning organization
 - Commissioning reports, check sheets, isolation procedures, permit to work procedures
 - ✓ Commissioning schedules
 - ✓ Commissioning planning meeting schedules
 - ✓ Commissioning spare parts
 - ✓ Open issue list
 - ✓ Minutes of meetings
- Definition of raw material and/or fuel requirements
- Preparation of a list with contact details of suppliers and contractors
- Establishment of the erecting support team to commissioning
- Definition of the hand-over procedure from erection to commissioning
- To clarify and comply with the project insurance requirements
- Safety in commissioning



Safety in commissioning

Environment:

 Site environment includes several issues, which must be considered in order to achieve a safe place to work

- such as lock-out tag out (local practices for electrical safety procedures), working at high, working with cranes and other lifting apparatus etc.

 Each site is individual. The safety issues and dangers must be analyzed and the procedure for a safe way to complete the work must be defined, instructed and supervised in each case individually
 such as traffic ways, areas with special dangers, areas with no admittance, chemicals etc.

Behavior and training:

- ✓ General training
- ✓ Site & client specific training
- \checkmark Own safe behavior all the time at the site \rightarrow Impact on the own personal colleagues' health

Personal protective equipment:

- ✓ Equipment required by the employer
- Equipment required by the customer / site
- Equipment required by the individual work



Commissioning preparations (process discipline)

- Definition of water run test loops
- Preparation of commissioning PI-diagrams (coloured) presenting each group
- Compilation of check-out lists
- Technical definitions for the execution of commissioning, test runs and start-up

Check-out:

First stage of the commissioning. The check-outs are the activities that ensure that the system is ready for water run. The installation inspection and Field Check-out certifies that a delivery and installation fulfils contractual and process technical demands.




Commissioning test groups

- The mill is divided in individual test groups
- A test group must be a suitable process / mill part. There must be a possibility to separate the individual test groups of each other mechanically (hand valve)
- The test systems are systematic commissioned and tested
- Commissioning PI-diagrams (coloured) presenting each group are prepared
- Check-out lists are created
- The test groups are placed in the commissioning time schedule



Commissioning test groups

- The mill is divided into individual smaller parts called test systems.
- A test system is a suitable part of the process or mill system, which may be commissioned and tested independently. The individual test systems can be mechanically (e.g. hand valve) separated from each other.

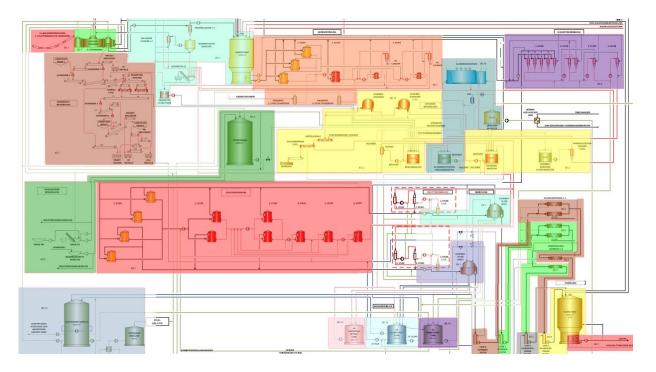



Commissioning test groups - examples


	6 Hellini	_	6		e	1		Construction of the last
A	Common systems & Utilities	В	Stock preparation		Steam and condensate system		L	Coating color kitchen
A1	Mill air		BHKP storage and dewatering	11	Steam and condensate HP&LP			CCK chilled water
A2	Instrument air		BHKP refining (back&print)	J	KM7			Starch system
A3	Freshwater		BSKP storage and dewatering		1 Dryer section			Coating color mixers and stora
A4	Cooling water		BSKP refining (print&middle)		2 Wet end			Coating color supply system
A5	Sealing water	B5	UBSKP storage and dewatering		3 HNC, Coater			CCK dye system
A6	Chilled water		UBSKP(BSKP) refining (back)	JO		D4		Latex
A6.1	Chilled water primary net Chilled water secondary systems 19		CTMP pulping and storage	JO	5 SNC, Web run, Sirius			PVA
A6.2			CTMP refining (middle)	JO				Pigments storage and filtration
A7	Heating water		Analysators Stock Preparation		7 Lubrication			Major & minor additives
A7.1	Heating water system 1		Approach flow system	JO	8 Machine air system		L10	Waste water treatment
A7.2	Heating water system 2		Print ply	JO	er føernite seenerter affres			
A8	Potable water and emergency showers	C2	Back ply) Working stations			
A9	Control system	C3	Middle ply	JŤ	Monitoring system			
A10	Ventilation	C4	Analysators Approach flow system	к	Wet end chemical systems			
A10.1	Hall ventilation KM7 hall	D	Broke system	K1	Alkaline detergent			
A10.2	Stock preparation hall ventilation	D1	Machine pulpers	KZ	Alum			
	Coating kitchen Hall ventilation		Other broke pulpers	KS	Bicarbonate and carbon dioxide			
A10.4	Boll Wrapping Hall ventilation	03	Broke HC towers and deflaking	K4	Biocide (also CCK)			
	KM Special room HVAC systems		Broke screening	KS	Cationic starch			
	Electrical rooms dryer section HVAC systems	05	Broke refining	KE	Chelating agent			
A11.2	Electrical rooms ED820, 807, 817, 818 HVAC systems	06	Roll splitter		Defoamer			
A11.3	Electrical rooms Stock preparation HVAC systems	07	Re-winder	KE	Dye blue & violet			
	Electrical room ED809 HVAC systems	D8	Wrapping line	KS	Filler clay			
	Electrical room ED808 rack room ED831, winder control room H	09	Core outter		Filler CaCO3			
		E	White water system	K1	1 Neutral size			
A11.7	Electrical room ED821HVAC systems Server room ED833HVAC systems	E1	White water storage		2 Retention polymer			
A11.8	Main control room HVAC systems		Disc filter and broke thickening		Betention silica			
A12	Office building HVAC systems	E3	Tank cleaning systems	K1	4 Bosin size			
A12.1	Laboratories HVAC systems	F	Warm and shower water systems		5 Sodium bisulfite			
	Maintenance HVAC systems	<u> </u>	Warm and shower water		6 Sodium hydroxide NaOH			
A12.2	Offices HVAC systems		Vacuum system		7 Spray starch			
			Vacuum system Vacuum		7 Spray staron 8 Sulphuric acid H2SO4			
	Social rooms HVAC systems			KI	o Sulphuric acid H2SU4			
A13	HVAC systems for small rooms in KM7 area		Effluent system					
A14	Fire water	H1	Effluent system					
A15	Sprinkler system							
A16	Field Boxes Instrumentation							
A17	ICT							
A18	WIS/WMS systems							
A20	Power Distribution							
A20.1	11Kv switchgears							
	Control and lighting voltage							
	Main process MCC's							
A21	Field boxes electrification							
A22	E-stop syst. KM7 process							
A23	E-stop syst. KM7 sect. drives							



Aalto University School of Chemical Engineering

Commissioning test groups


• Commissioning PI-diagrams (coloured) presenting each group are prepared

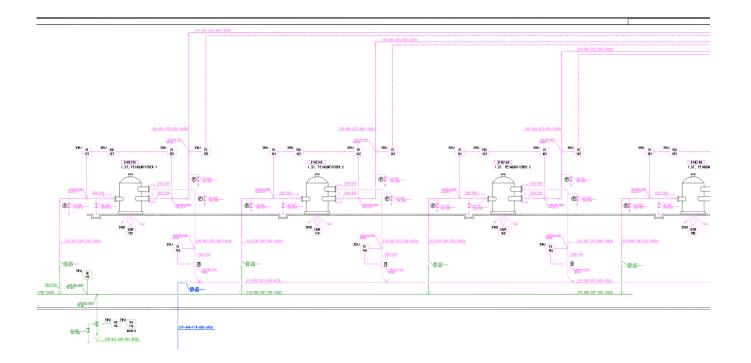



Commissioning test groups

• The test systems are systematically commissioned and tested: Detailed list of all equipment, loops, pipelines and electrical circuits for installations, check-out procedures and testing progress. One list per test system and per discipline.

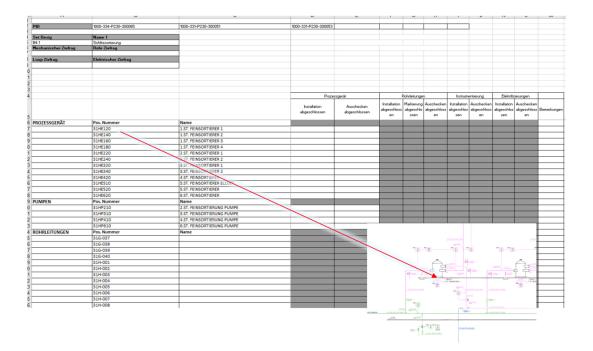



Summary check-out list

• Creation of summary check-out lists: An overall view of the status of mechanical, electrical and automation commissioning activities for a given test system.

	Area: Test System:		XXXXX XXXXX	Area Name Test system Name											System ready for water run: When al	
					Mechanical	Equipment	Piping			Control Equ	upment	Electrical E	Equipment	Remarks	relevant Inspections and Check-out	
					Installation Completed	Check-Out Completed	Installation Completed	Marking Completed	Check-Out Completed	Installation Completed	Check-Out Completed	Installation Completed	Check-Out Completed	remerks	activities related to the Test system h	ave
Equipment	Pos. number		Name 1	Name 2												
															been completed and the test system	ic
								_							been completed and the test system	3
						_	_		_		_				ready for Water run.	
Pumps	Pos. number		Name 1	Name 2												~ ~
															 System taken over for water run: Wh 	en
								_			_		_	-	the Water run team (operators) have	
Tanks	Pos. number		Name 1	Name 2				_							made an overall inspection of the Tes	st 👘
															system and found the system ready f	or
															System and round the System roudy i	
															Water run.	
Pipelines	Pos. number	Media	Name 1	Name 2											Walti Iuli.	
															 Water run completed: When the Water 	or
															• water full completed. when the wat	31
															www.headhaan.a.headhaan.a.headhaan.a.h	
						_		-			_		_		run has been completed and the test	
															•	
															system is considered ready for start-	JD
																- I -
Instrument									-						operation	
Loops	Pos. number		Name		_	_		_		_		_	_		operation	
											_					
Electrical	D		Y.													
circuits	ros. number		Name													

System Ready for Water Run System Taken over for Water Run

Water Run Completed

Commissioning test groups

The test groups are placed in the commissioning time schedule, which also works as a guidance tool for the completion of the installation during erection period. It is planned so that the work is done systematically and that the start-up can be done in the correct and logical sequence.

D	REV	TEST SYST	Text19	34	35 36	September 37 38	39	Oct 40 41		Novem 44 45 46	1ber 47 48	Decemb 49 50 5	er 1 52	January 1 2 3	4 5 6	ebruary March 7 8 9 10 11 12 13	
1113		L09	Major & minor additives											8.1 ┥	12	● 22.2	
589 277		D07	Re-winder								3.12	•			4.2 🔶	● 15.2	
		A12.2	Maintenance HVAC systems												4.2 🔶	® 15.2	
304		A13	HVAC systems for small rooms in KM7 area												4.2 🔶	® 15.2	
1091		L07	PVA											41 ┥	4.2 🔶	® 22.2	
295		A12.4	Social rooms HVAC systems													۰ و	
																	_
			Ready for pipe marking <	ioining 🔶		Commiss	ioning c	ompleted	۲								-



٠

Terminology related to commissioning

Installation inspection:

The installation inspection certifies a delivery and an installation that fulfils contractual and process technical demands.

FAT (factory acceptance test):

Software testing of process control concepts after the programming in a way that the control system description corresponds to the application programming. Normally carried out during the final part of the design and engineering phase before the final installation in the mill. Application configuration checking in simulation situation. Base parameters for control loops.

SAT (site acceptance test):

Test after the complete installation and final configuration. Every signal will be tested (measurements, controls, binary signals)



Terminology related to commissioning

DCS (distributed control system):

A digital automated industrial control system that uses geographically distributed control loops throughout a factory, machine or control area. DCS allows each section of a machine to have its own dedicated controller that runs the operation. A DCS has several local controllers located throughout the area that are connected by a high-speed communication network. While each controller works autonomously, there is central supervisory control run by an operator.

PLC (Programmable logic controllers):

A programmable logic controller (PLC) is a modular solid state computer with customized instructions for performing a particular task. Examples of applications are non-continuous control and event-based manipulations.

MCS (machine control system):

Controls the loops of a certain machine, e.g. paper machine.

QCS (quality control system):

The quality control system of a paper machine controls the quality parameters of paper (Basis Weight, Moisture, Caliper, Ash and Color).



Terminology related to commissioning

Field Check-out:

For electrical and process control objects, the field check-out certifies a delivery and installation that fulfils contractual and process technical demands. Electrification Field check-out is a part of installation and is made by installation contractor. Field check-out includes also rotation direction check for motors.

Functional test:

Verification that interconnected process control programs communicate with each other and perform the intended operations.

<u>I/O test:</u> Part of functional testing

Loop Check-out:

Verification that interconnected process control programs communicate with each other and perform the intended operations.

<u>Field test for instrument loops:</u> Part of process control. Mechanical, electrical and pneumatic testing of instrument loops.



3. Execution of commissioning



Execution of commissioning

Cooperation is important!





Cooperation & communication: CUSTOMER / DESIGNER / SUPPLIER




Mechanical commissioning and check-out activities



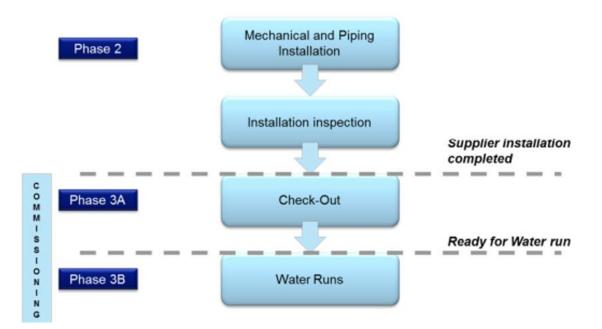



Commissioning mechanical equipment

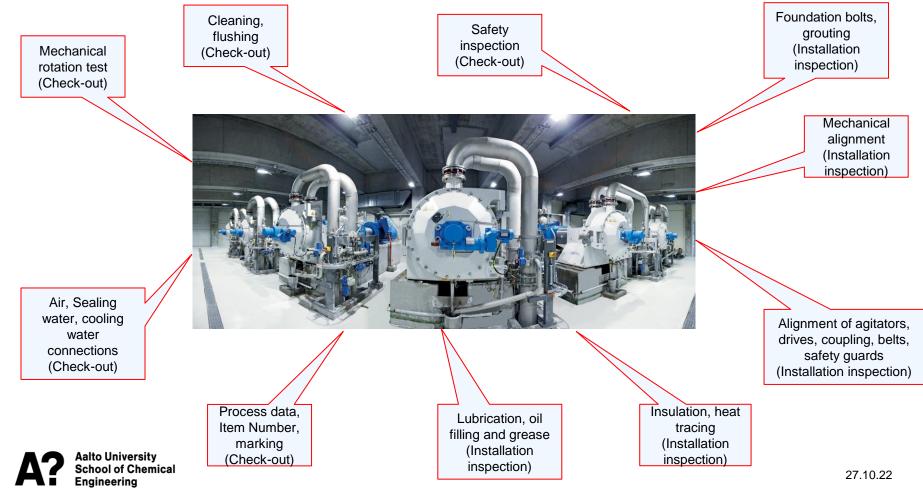


Discipline check-out list mechanical equipment

- <u>Mechanical equipment installation completed:</u> The equipment is completely installed, pressure tested, aligned and foundations are grouted.
- <u>Check-Out Completed:</u>
 The check-out activities as are performed

							Insta	llation						Commis	ssioning		
POS NO.	TANK NAME	P&ID	Foundation botts, grouting	Mechanical alignment	Internal piping partition walls	Alignment of agitator, drives coupling, betts,	Heat tracing installed and insulated	Pipe connections, vents,	Instrument connections	Manhole covers, steps, ladders etc	Authority test and inspections	INSTALLATION COMPLETED	Process data, Item No., marking	Cleaning	Safety inspection	READY FOR WATER RUN	REMARKS
			T1	T2	T3	T4	T5	T6	T7	T8	Т9		T10	T11	T12		
		9												1		e	13



Commissioning piping

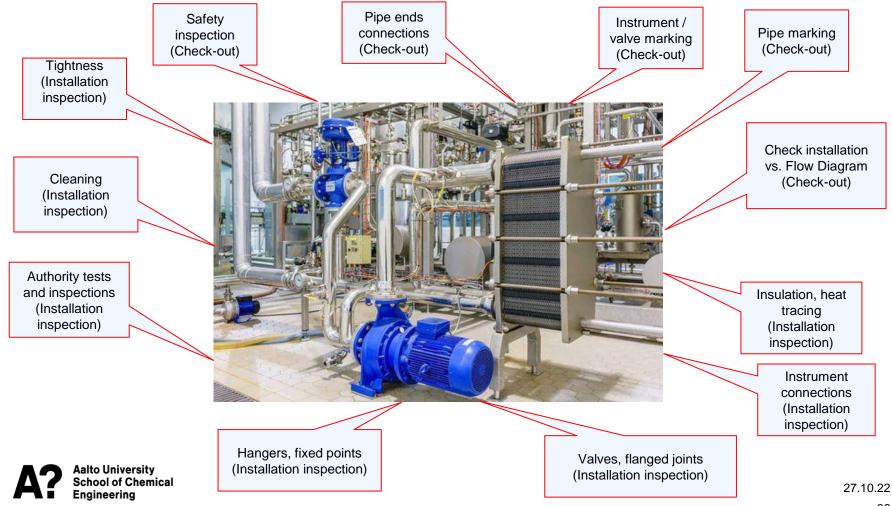

Discipline check-out list piping

• <u>Piping Installation completed:</u>


The complete pipeline is installed, pressure & leak tested. Pipe marked according to drawings and instructions.

<u>Check-Out Completed:</u>
 The check-out activities as are performed

							Installation Commissioning													
POS NO.	PIPELINE NAME	P&ID	Flow Media	Insulation class	Pipe Class	Tightness	Cleaning Cleaning	Huthority test and inspections	Hangers, Fixed points	Jahres, flanged Gints	a Instrument connections	Lo Insulation	INSTALLATION	Check vs flow diagram	Pipe marking	Valve / So Instrument Comarking	Connected to	ය Safety Inspection	READY FOR WATER RUN	REMARKS



Commissioning tanks and towers

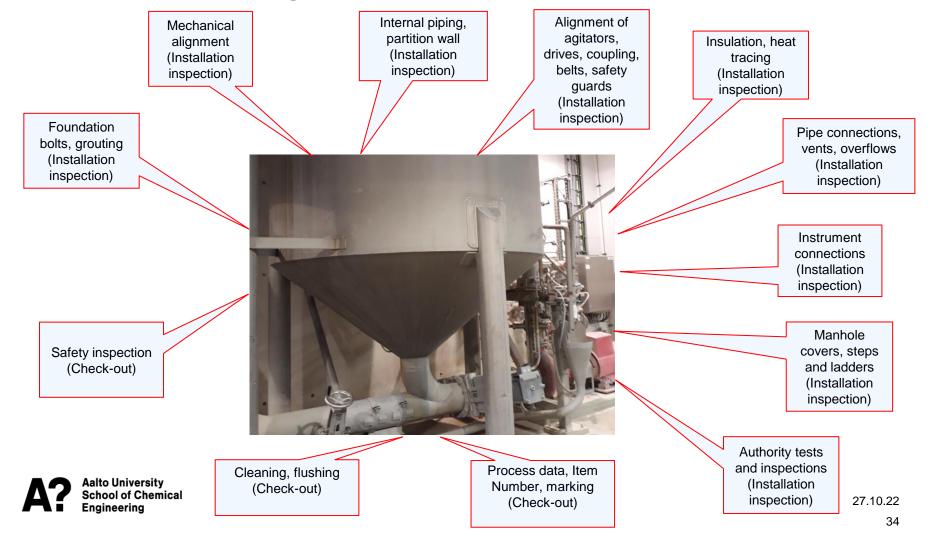

Discipline check-out tanks and towers

• Tanks and towers installation completed:


The tank is installed and pressure & leak tested. Tank marked according to drawings and instructions.

<u>Check-Out Completed:</u>
 The check-out activities as are performed

							Insta	llation						Commi	ssioning		
POS NO.	TANK NAME	P&ID	Foundation bolts, grouting	Mechanical alignment	Internal piping partition walls	Alignment of agitator, drives coupling, betts,	Heat tracing installed and insulated	Pipe connections, vents,	Instrument connections	Manhole covers, steps, ladders etc	Authority test and inspections	INSTALLATION COMPLETED	Process data, Item No., marking	Cleaning	Safety inspection	READY FOR WATER RUN	REMARKS
Too No.		10.0	T1	T2	Т3	T4	Т5	T6	17	<u>T8</u>	T9		T10	T11	T12		TCHINING .
	~	-	ы <u></u>		¢			1			ti i			s	R		8



Electrical commissioning and check-out activities

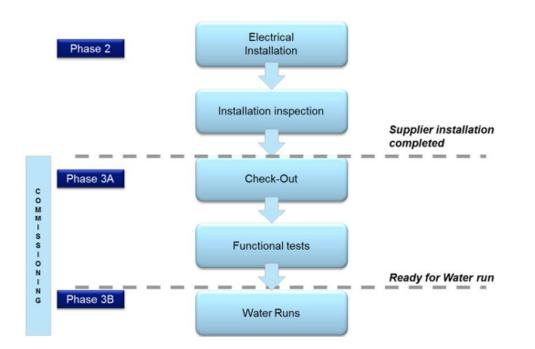


ELECTRICAL



Electrical commissioning

Motor Control Circuit Checks:

- Motor data from the motor rating plate
- Motor starter sizing
- Fuses
- Contactor
- · Overload setting
- Variable speed drive rating and settings
- · Starter is in test position
- · Switch on the control voltage
- Contactor on-off from control system
- Contactor feedback
- · Fault in starter
- Thermal overload and ground fault
- Local stop
- Local start/stop (if applicable)
- Safety interlocking (limit switches etc. if applicable)
- Emergency stop (if applicable)
- Other issues

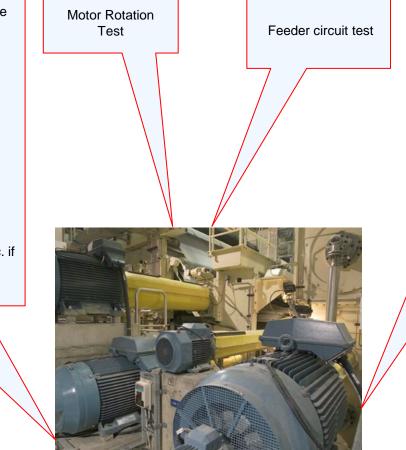

Functional and Interlocking Tests:

- Circuit functionality in the process
- Interlockings between different circuits (motor circuits and instrument loops etc.) are working in accordance with the control system description and operation manuals
- Final adjustments of field devices
- Group starts, automatic operations and sequence controls
- Special functions
- Current and/or power reading in DCS

Electrical discipline check-out list

Electrical equipment Installation completed:

The MCC, I/O racks and the Process equipment (motor etc.) are installed and the control and power cables are connected in both ends and when the cold test have been made

• <u>Check-Out Completed:</u>


The check-out activities as are performed

|--|



Automation commissioning and check-out activities

PROCESS CONTROL

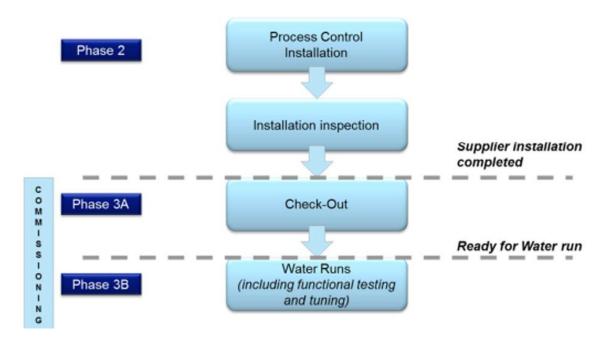



Automation commissioning

- Check communication between loop devices and DCS, MCS or other systems as specified in the documentation
- Device software check
- Device check-out (valve opening with different signal outputs, checking and adjusting the 0-point etc.)



Preparation of the field box for check-out by clean blow of pneumatics etc.



Aalto University School of Chemical Engineering Preparation of the device/loop ready for water run with power on, impulse lines filled etc. as required.


Power up of field boxes, devices etc.

Functional Check-out:

- The loop performance according to documentation with water as main process media.
- Interfaces to other loops, motors, aux systems, safety etc.
- Check and adjustment of loop functionalities, interlockings, alarms, group starts/stops
- Test of safety systems

Automation discipline check-out list

- <u>Control equipment Installation completed:</u> The instrument or valve is mechanically installed according to certified documentation, when the cables are connected in both ends and when the cold test have been made
- <u>Check-Out Completed:</u>
 The check-out activities as are performed

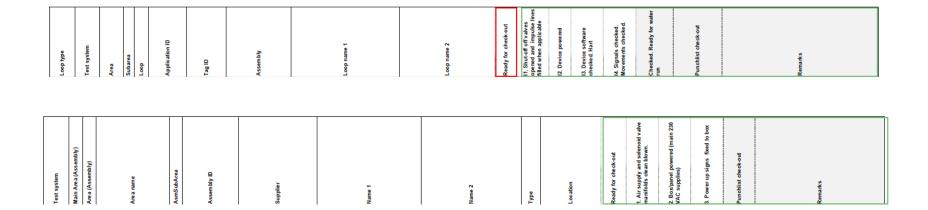





Deviation handling

Punch list:

List of notified deviations. Punch lists are made per discipline.

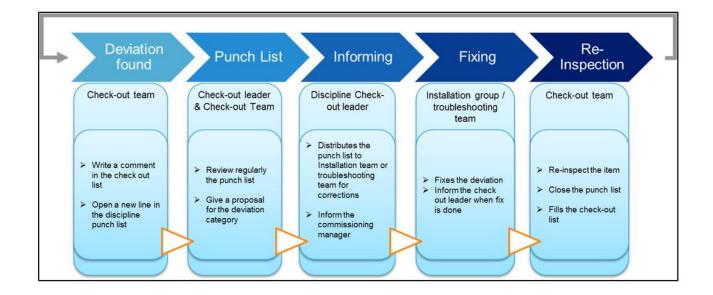



Execution of commissioning

Water runs

- Final stage of commissioning when the process is operated with water instead of media. Carried out when the whole test system is ready. The process is simulated.
- Flanges are checked for tightness, leakages are checked, the function of the plant is checked, possible vibrations and noises are investigated, the function and capacity of valves, pumps, agitators and fans are measured and the instruments are adjusted and fine-tuned. Motor currents are checked Checking: Leakages and in pipelines and tanks.
- Started by running single machines within the test system first, then whole system and later several tests' systems together.



Execution of commissioning

Rotation test:

Part of electrical commissioning; it is done to ensure that electrical motors work properly.

Start-up:

Start-up with pulp after commissioning is completed. The moment when all suppliers' and contractors' responsibilities are fulfilled and the equipment is ready for test run with media.

Take over:

Start of production when all tests are finalized and the equipment reaches the requested quality targets.

Production:

Final phase of the start-up; production of final, saleable product. Preceded by takeover certificate.



Execution of commissioning

Red Pen Markings:

During commissioning phase differences between what has been installed on site and what is shown in the engineering documents may be observed. Reasons for this can be needed changes, changed needs or practical improvements or. The final installation or programming is documented in the red pen versions of the engineering documents. The as-built documents are produced based on the red pen versions.

<u>As-built documentation:</u> Documentation based on the situation when saleable production is started. No revisions will be done afterwards.



4. Examples occurrences during commissioning



Case: Wrong pump type








Case: Wrong pump type











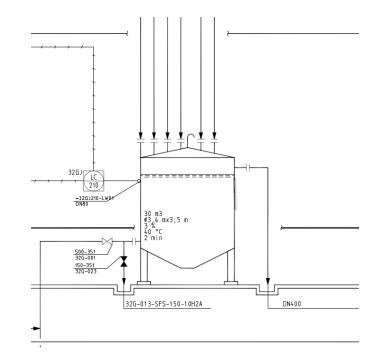




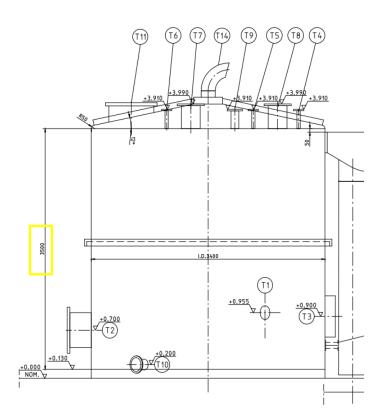

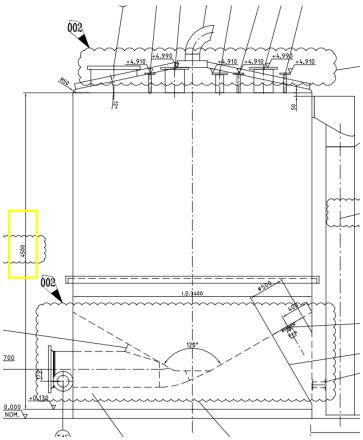

Aalto University School of Chemical Engineering

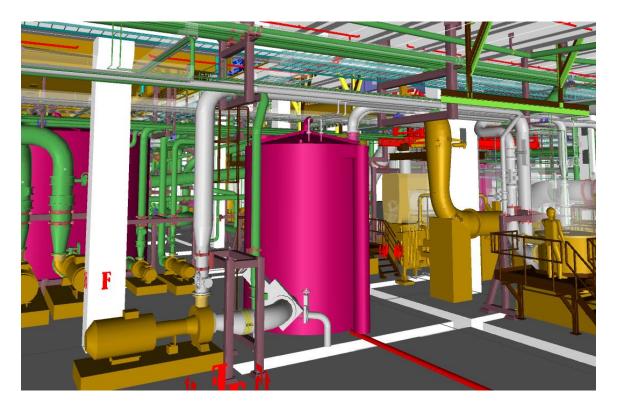










Case: Wrong level measurement placing

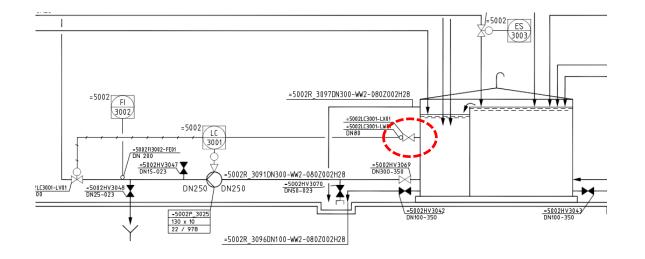





Case: Wrong level measurement placing

