



Aalto University  
School of Electrical  
Engineering

# ELEC-E8126: Robotic Manipulation Manipulation

Ville Kyrki

11.2.2019

# Learning goals

- Increase understanding and gain intuition on mechanics of manipulation.
- Understand the theory of form closure grasp planning.

# Goal: Grasp planning

- Where an object needs to be grasped in order to perform a particular task?
  - In this context, where to place contacts on the object to immobilize it.
- Grasp analysis: Given information of contacts on an object (informal definition for *a grasp*), determine if the grasp is stable (immobilizes the object).

# Recap: Single contact

- Impenetrability constraint

$$\mathbf{F}^T \mathbf{V} \geq 0$$

motion velocity twist

contact point


contact normal

$$\mathbf{F} = (\mathbf{p} \times \mathbf{n}, \mathbf{n})$$

- Motion constrained to half-plane
- $\mathbf{F}^T \mathbf{V} = 0$  if bodies remain in contact (to first-order, not considering curvature).


# Several contacts in plane

- Can the object move? Around which point?

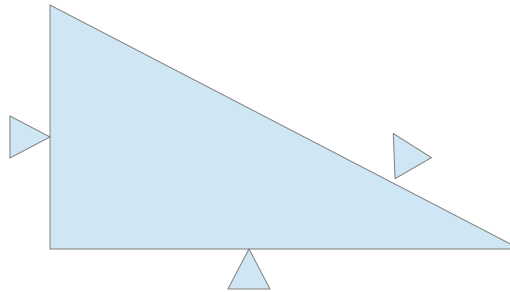


# Several contacts in plane

- Geometrical approach (instant center of rotation)

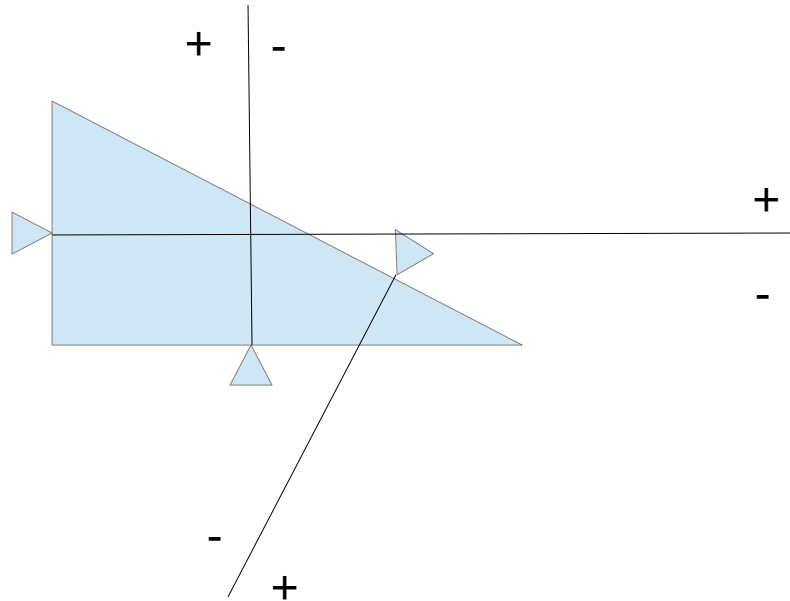

# Several contacts in plane

- Geometrical approach (instant center of rotation)

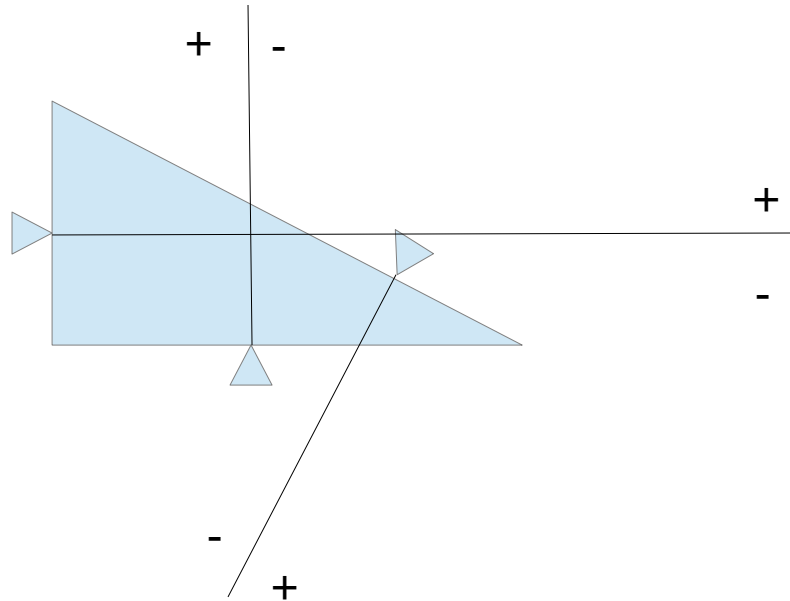


# Contact constraints

- What are the feasible motions?

For each (not moving) contact:

$$\mathbf{F}_i^T \mathbf{V} \geq 0$$

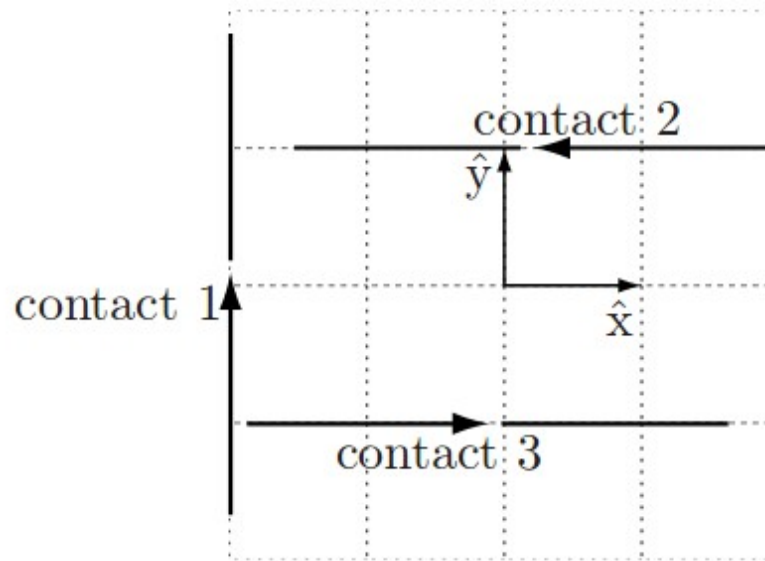


$$\mathbf{F} = (m_z, f_x, f_y) = ?$$

Motion constraints?




# Contact constraints

- Contact constraints form a polyhedral convex cone

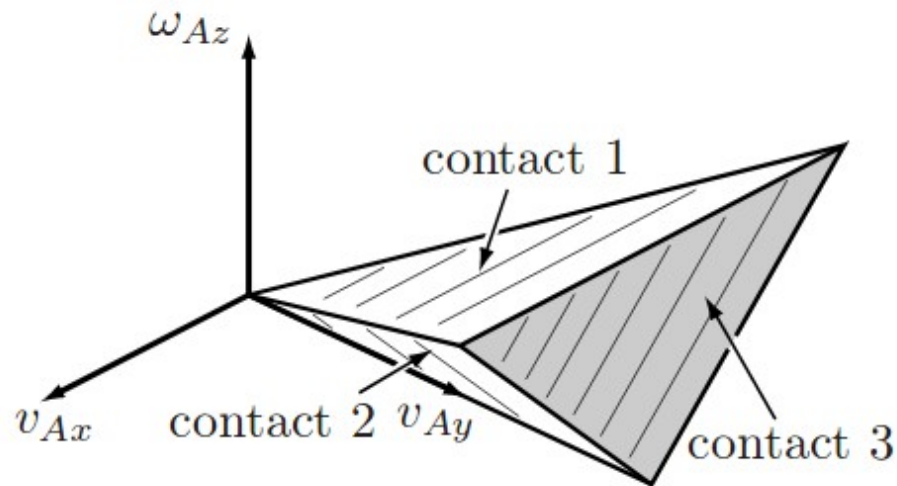

What happens if contacts immobilize object?

# Form closure

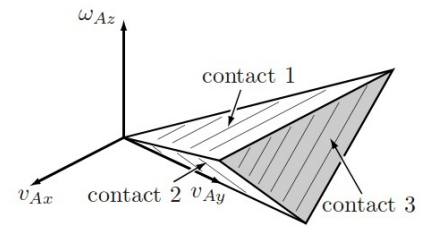


- Form closure: a set of stationary contacts prevents all motions.
- Using first order analysis, impenetrability constraints are satisfied only by zero twist.

$$\mathbf{F}_i^T \mathbf{V} \geq 0$$

- Equivalently, contact wrenches span positively entire space.



$$\left\{ \sum_i k_i \mathbf{F}_i \mid k_i \geq 0 \right\} = \mathbb{R}^6 \quad \leftarrow \text{linear prog. sol.}$$

- Higher-order analysis may provide form closure even without above constraints (curved surfaces).



# Quality of a grasp

- Is one of these grasps better? Why?

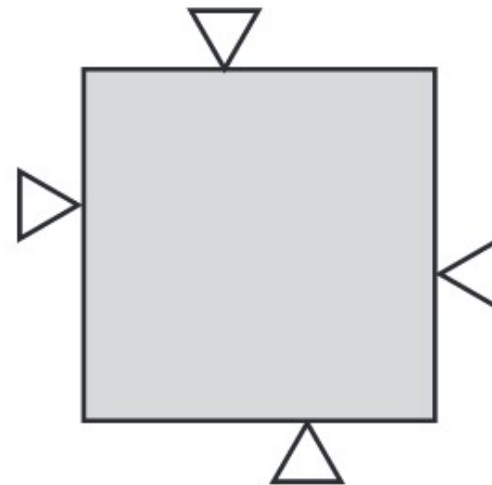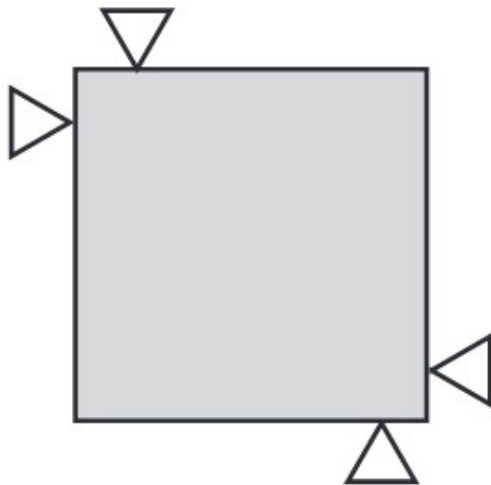

# Grasp quality metrics

- Grasp metric (Q): A number calculated based on contact wrenches so that  $Q < 0$  indicates not stable and larger positive values indicate better grasps.
- Typical idea: How big external disturbances a grasp can withstand.
- Information about tasks or expected disturbances can be used.

# Worst case quality without prior information

- Set of possible wrenches:

$$CF = \left\{ \sum_i k_i \mathbf{F}_i \mid 0 \leq k_i \leq f_{\max} \right\} = R^6$$





maximum force per contact

- What's the largest ball that fits inside polytope CF?





smallest external force that breaks grasp

- Practical notes

- scale moments (torques) by characteristic length of object
- origin at object CoM



# Which one is better?

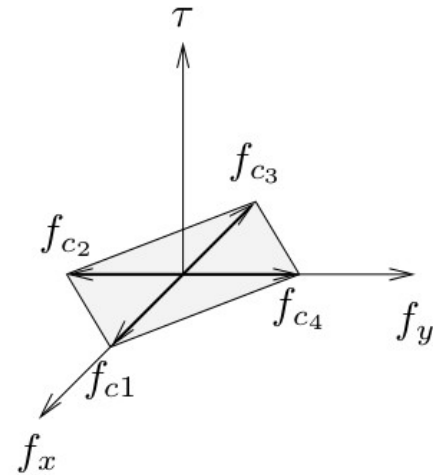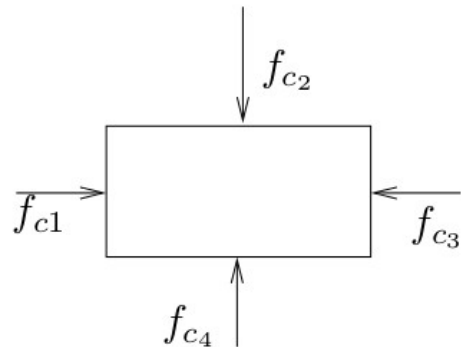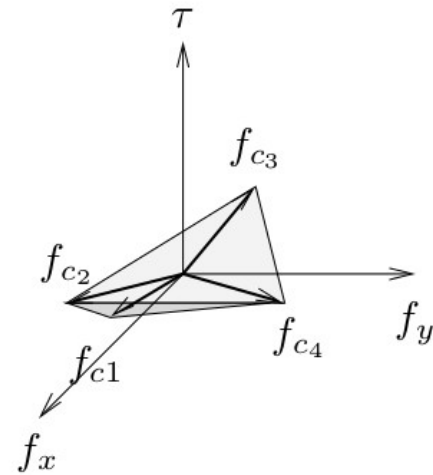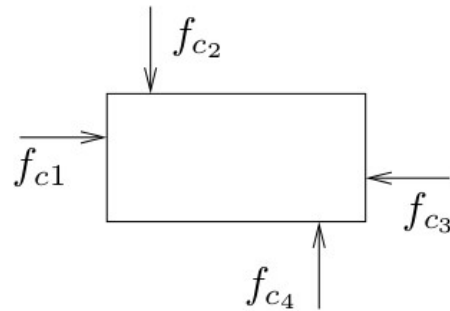

# Sampling based grasp planning

- Now that we have a metric, how to plan a grasp?
- Sampling
  - Choose candidate contacts
  - Evaluate resulting grasp
- More about grasp planning next week

# Summary

- Form closure means that the form of stationary contacts prevents motion.
- Impenetrability constraints can be used to analyze feasible motions.
- Grasps can be planned by maximizing grasp quality metrics.



# Next time: Manipulation and friction

- Contacts with friction
- State-of-the-art in grasp planning
- Readings:
  - Lynch & Park, Chapter 12.2-12.2.2