
## CHEM-E7190/2021: Exercise II - Linearization + simulation (Euler)

Task 1. Consider the stirred-tank heating system. The liquid inlet stream consists of a single component with a mass flow rate  $w_i$  and an inlet temperature  $T_i$ . The tank contents are agitated and heated using an electrical heater that provides a heating rate, Q. A dynamic model will be developed based on the following assumptions:

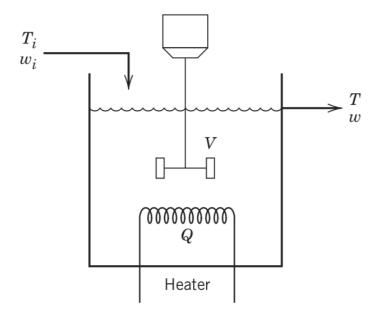

- 1. Perfect mixing; thus, the exit temperature T is also the temperature of the tank contents.
- 2. The density  $\rho$  and heat capacity C of the liquid are assumed to be constant. Thus, their temperature dependence is neglected.
- 3. Heat losses are negligible.
- 4. The flow rate exiting the tank is through an orifice, and the overall rate is dictated by hydrostatic forces.

Use the stirred tank model that you developed in Exercise 1.

V(t) and T(t) are the state variables,  $w_i(t)$ ,  $T_i(t)$  and Q(t) are the inputs and  $\rho$ ,  $C_v$ , A and  $C_c$  are the model parameters.

- 0. Verify that the given model equations are correct;
- 1. Write a script (with model function) to simulate the reactor for different initial conditions and inputs;
- 2. Choose  $\rho = 1$ ,  $C_v = 1$ , A = 1 and  $C_c = 1$  for the model parameters, reasonable values for the initial conditions (V(0), T(0)) and the inputs  $(w_i(t), T_i(t), Q(t))$ , for  $0 \le t \le t_f$  and test your implementation. To verify/demonstrate the correctness of your implementation, display the evolution of all model variables.
- 3. For the chosen model parameters, define a set of operating conditions  $(w_i^{SS}, T_i^{SS}, Q^{SS})$  of your choice to run the reactor and find the corresponding steady-states  $(V^{SS}, T^{SS})$  by simulating the process for a sufficiently long tine.

