



Aalto University
School of Engineering

MEC-E2009 Marine Risks and Safety

L2

Introduction to reliability theory, classic accident modeling theories

Ahmad Bahoo Toroody, Ph.D.

Aalto University, Marine and Arctic Technology

Learning logs L1

General F&Q

Contiguous zone role?* Is the potential extension to exercise necessary controls to prevent infringements of customs, fiscal and laws linked to the territorial sea

IALA?

Comments

Interest on learning more about the development of safety related (also regulatory aspects) linked to autonomous ships

Heavy in content but not difficult to process

Interesting to see and better understand the influence of coastal states

Sea domains and division of sea areas linked to regulations

Interest for analysis of risk and assurance of safety on MASS

Nice to see people familiarized with MARPOL

The challenge of writing the logs without attending the lecture

Areas where two states are separated by water but are located close to each other, the distances usually used to define the territorial waters may not be applicable. Yes indeed, that's why shared responsibilities are given (e.g. Finland/Estonia/Sweden).

The issues of the freedom of the high seas and need for more controls

The issue on commitment to adopt critical regulations and the approach per country

Learning logs L1

Student number	Week 1	Week 2	Week 3	Week 4	Week 5	Points
586388	Received					2,8
655866	Received					3
647036	Received					2,8
665856	Received					3
665461	Received					3
712110	Received					2,5
606077	Received					3
654391	Received					3
902360	Received					1,5
32862N	Received					3
1009424	Received					3
100686544	Received					2,8
100524787	Received					2

Fast quiz L1

Student number	E-Q1	E-Q2	E-Q3	E-Q4	E-Q5	E-Q1	E-Q2	E-Q3	E-Q4	E-Q5	TOTAL	Grade
655866	100					0,15	0,25	0,25	0,2	0,15	15	
654391	100					0,15	0,25	0,25	0,2	0,15	15	
586388	80					0,15	0,25	0,25	0,2	0,15	12	
100686544	85					0,15	0,25	0,25	0,2	0,15	13	
665856	100					0,15	0,25	0,25	0,2	0,15	15	
100474280	80					0,15	0,25	0,25	0,2	0,15	12	
665461	100					0,15	0,25	0,25	0,2	0,15	15	
606077	100					0,15	0,25	0,25	0,2	0,15	15	
100524797	90					0,15	0,25	0,25	0,2	0,15	13,5	
712110	95					0,15	0,25	0,25	0,2	0,15	14	
32862N	90					0,15	0,25	0,25	0,2	0,15	13,5	
647036	100					0,15	0,25	0,25	0,2	0,15	15	
100885824	80					0,15	0,25	0,25	0,2	0,15	12	
902360	70					0,15	0,25	0,25	0,2	0,15	10,5	
1009424	100					0,15	0,25	0,25	0,2	0,15	15	

No participation

Min	Max	Grade
0	50	0
50	60	1
60	70	2
70	80	3
80	90	4
90	100	5

L2: Intended Learning Outcome (ILO)

By this course You will be able to;

- Learn about different type of **Uncertainty**
- Understand the Basic Concepts in **Reliability Engineering**
- Find your track for developing your knowledge for advance Reliability Assessment of Complex System or Structures
- Understand the foundations and goal/objectives of classic **accident modelling techniques**

Lecture content



Reliability engineering



Approaches for reliability assessment



Structural reliability theory



Conclusion of reliability engineering



Classic accident modelling theories and hazard analysis methods



CA, LL, and FQuiz




Aalto University
School of Engineering

Reliability engineering

Definitions

Safety:


“Safety is the state of being "safe", the condition of being protected from harm or other danger. Safety can also refer to the control of recognized hazards in order to achieve an acceptable level of risk. Safety in engineering is about understanding hazards and risk, managing risk by providing the appropriate layers of protection to reduce the frequency and severity of incidents, and learning from incidents when they happen (Stapelberg, 2009) ”

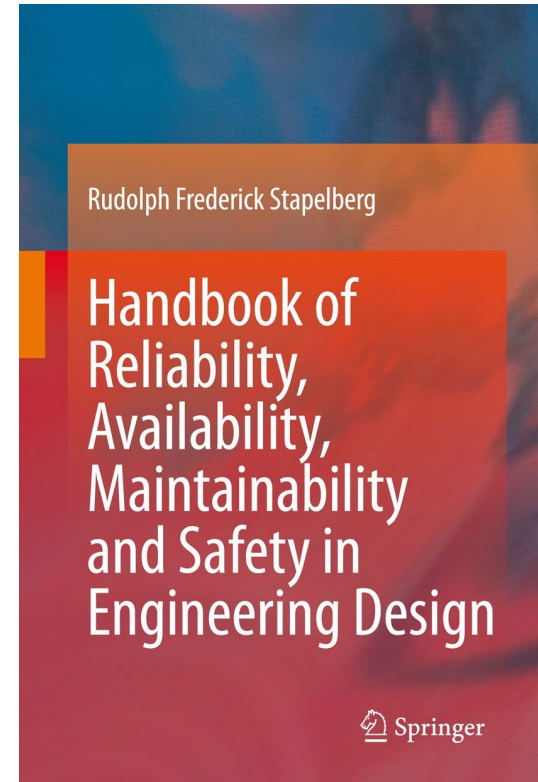

Definitions

Reliability:

“Reliability is defined as the probability that a product, system, or service will perform its intended function adequately for a specified period of time, or will operate in a defined environment without failure (O'Connor, 2012)”

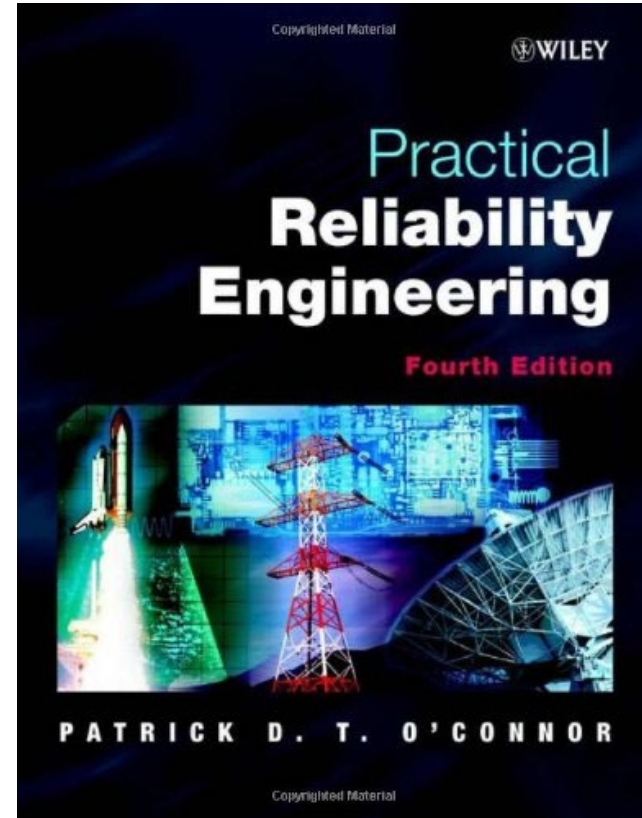

Why Reliability is important?


1. To estimate remaining useful lifetime of an asset
2. To optimize the maintenance plan
3. To reduce costs of failure caused by system downtime
4. To increase the availability of asset
5. To optimize the asset value by increasing asset lifespan

How to define Reliability?

Reliability is defined as a probability that a system (structure) will function over some time period t


$$R(t) = Pr\{T > t\} = \int_t^{\infty} f(x) dx$$

where $f(x)$ is the failure probability density function and t is the length of the period of time (which is assumed to start from time zero).

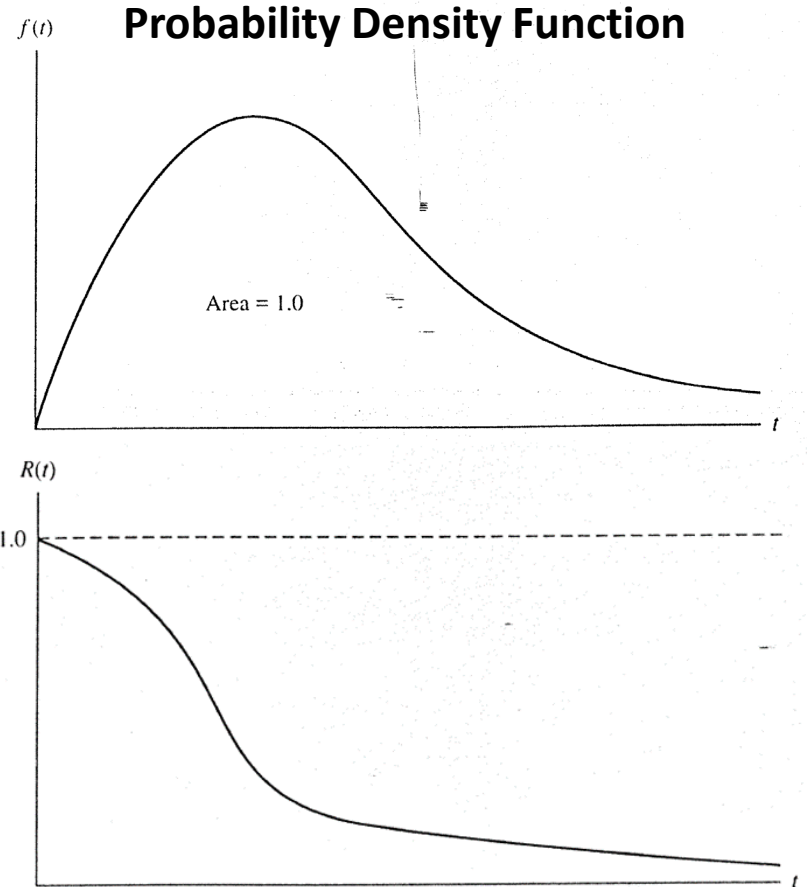


How to collect reliability data?

Historical Data of a system (structure) function over some time period t

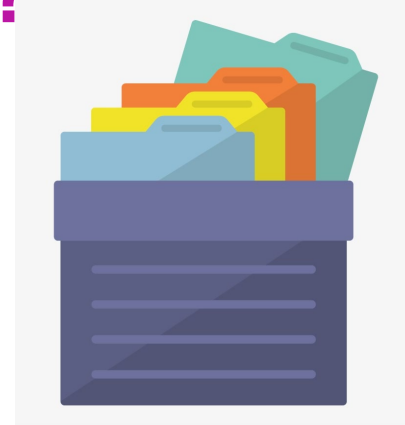

Accelerated Life Testing (ALT) to induce field failure in the laboratory at a much faster rate by providing a harsher, but nonetheless representative, environment.

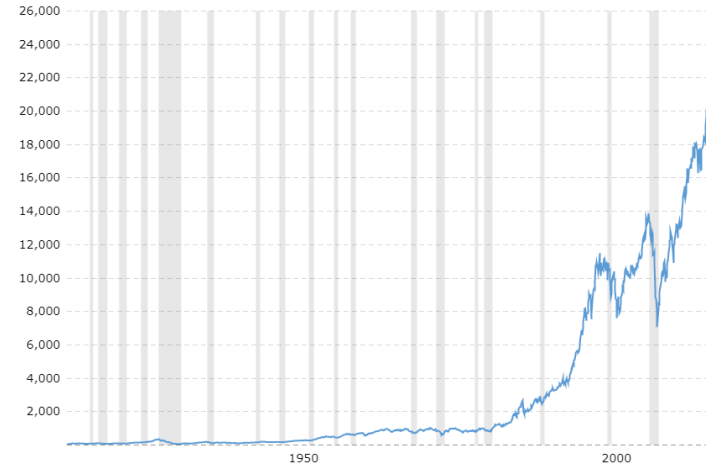


Probability Density Function

Different PDF can represent the failure trend over the operational time. What are the most common options for that?

1. Normal distribution

normal distribution is a probability distribution that associates the normal random variable around central value, called the **mean**.

$$f(x) = \frac{e^{-(x-\mu)^2/(2\sigma^2)}}{\sigma\sqrt{2\pi}}$$

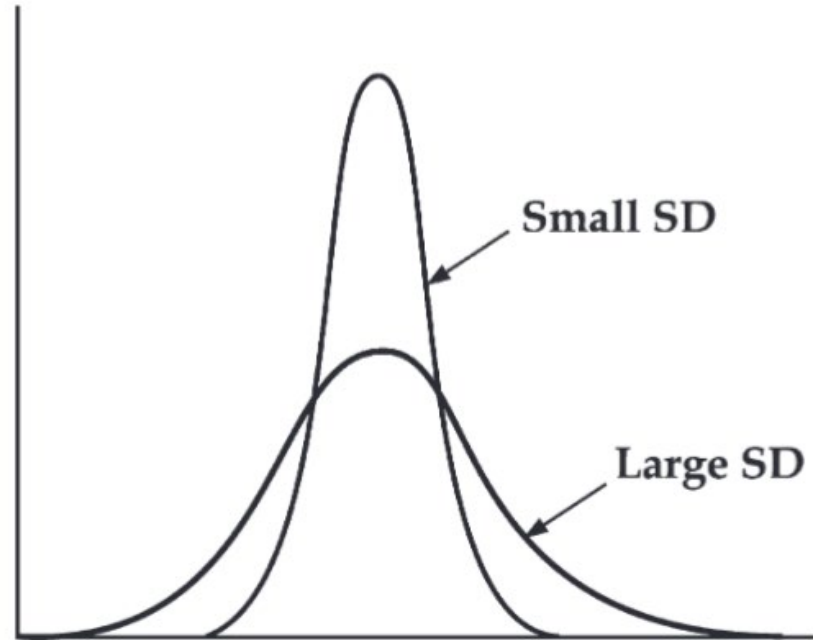


Probability Density Function

2. Weibull distribution

where $k > 0$ is the shape parameter and $\lambda > 0$ is the scale parameter of the distribution.

$$f(x; \lambda, k) = \begin{cases} \frac{k}{\lambda} \left(\frac{x}{\lambda}\right)^{k-1} e^{-(x/\lambda)^k} & x \geq 0, \\ 0 & x < 0, \end{cases}$$

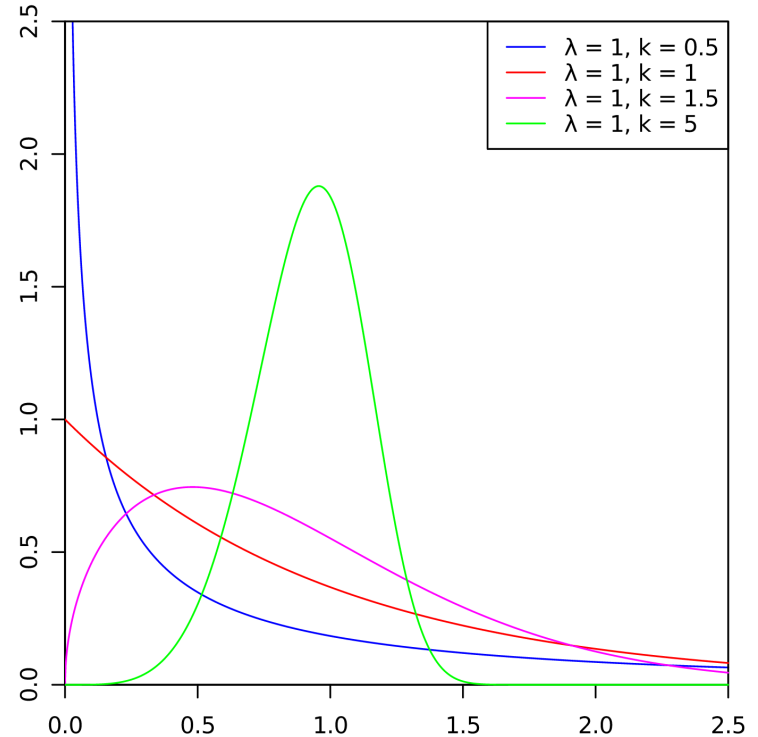


Probability Density Function

2. Weibull distribution

A value $k < 1$ indicates that the failure rate **decreases** over time

A value of $k = 1$ indicates that the failure rate is **constant** over time.

A value of $k > 1$ indicates that the failure rate **increases** with time.

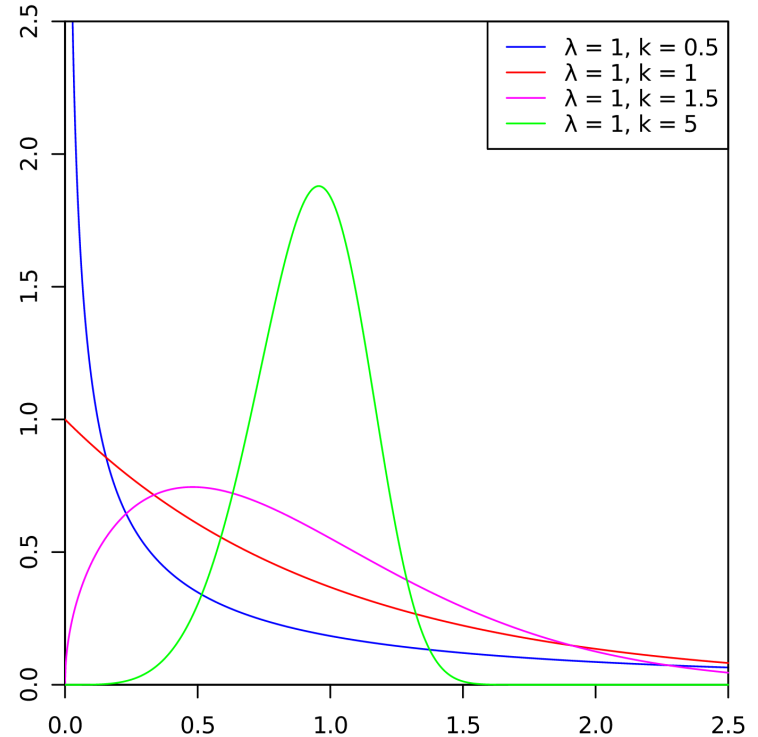


Probability Density Function

3. Exponential distribution

Here $\lambda > 0$ is the parameter of the distribution, often called the failure rate parameter.

$$f(x; \lambda, k) = \begin{cases} \frac{k}{\lambda} \left(\frac{x}{\lambda}\right)^{k-1} e^{-(x/\lambda)^k} & x \geq 0, \\ 0 & x < 0, \end{cases}$$

$$f(x; \lambda) = \begin{cases} \lambda e^{-\lambda x} & x \geq 0, \\ 0 & x < 0. \end{cases}$$

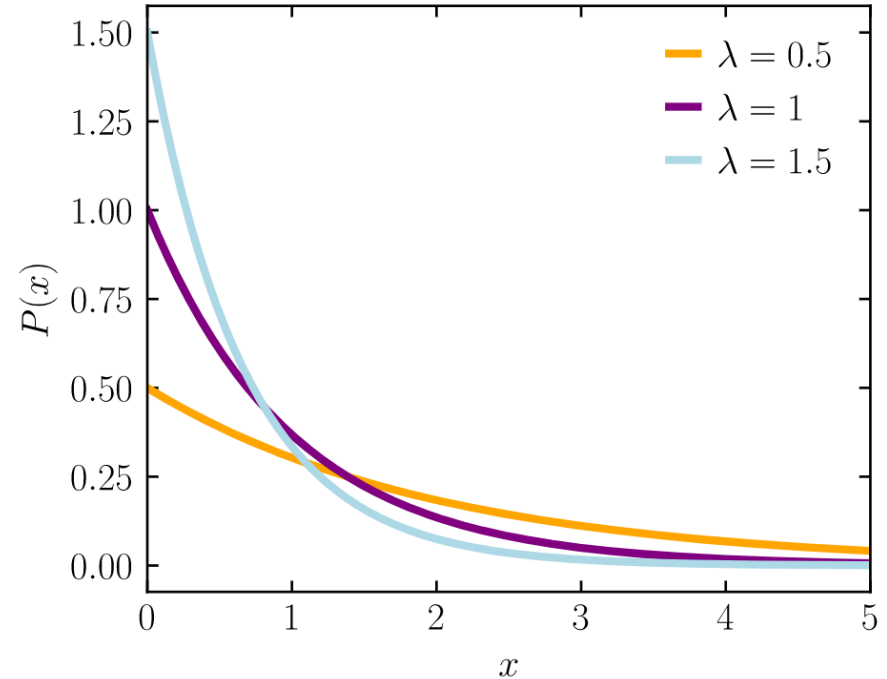


Bathtub Hazard Rate Curve

Failure Rate:

gives an instantaneous rate of failure in time

$$\begin{aligned}\lambda(t) &= \lim_{\Delta t \rightarrow 0} \frac{-[R(t + \Delta t) - R(t)]}{\Delta t} \cdot \frac{1}{R(t)} \\ &= \frac{-dR(t)}{dt} \cdot \frac{1}{R(t)} = \frac{f(t)}{R(t)}\end{aligned}$$

$$= \frac{\text{Number of failures}}{\text{Period of Time}} = n / T$$

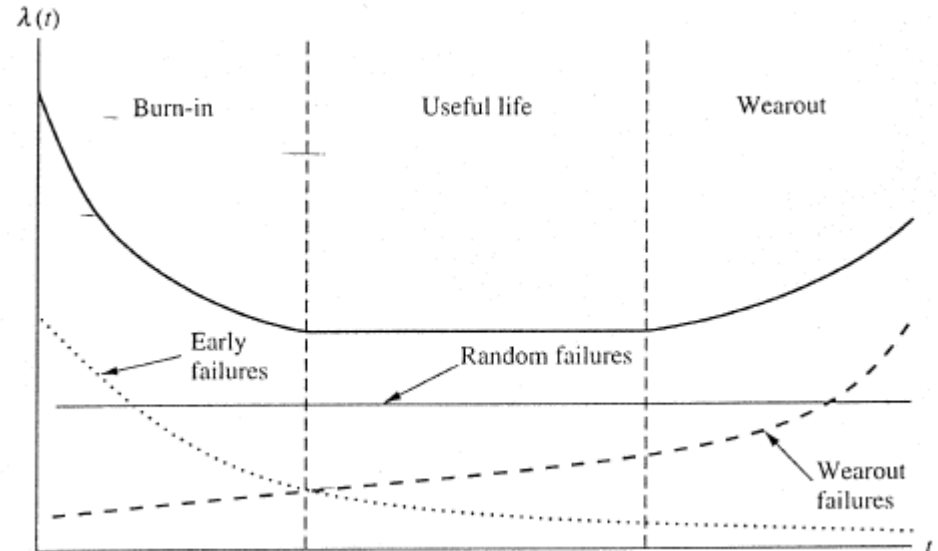

What is Uncertainty?

The Engineering Problems involves in two Type of Uncertainties

1. Epistemic uncertainty: reducible uncertainty

An epistemic uncertainty refers to the deficiencies by a **lack of knowledge or information**.

Sources: (1) the statistical uncertainty due to the use of limited samples. For example, the mean value of wave load based on two or three measurements;

(2) the model uncertainty associated with the idealization and assumptions of model, for example, an assumption of a constant coefficient in a PDE.

What is Uncertainty?

The Engineering Problems involves in two Type of Uncertainties

2. Aleatoric uncertainty: uncertainties due to intrinsic variability in the system

Intrinsic variability may be attributed to a property of the system based on repeated measurements of the property or may be associated with variability in time or space; **differ each time we run the same experiment**

Aleatoric is derived from the Latin *alea* or *dice*, referring to a game of chance



What is Uncertainty practically?

How will System/Component/Structure fail?

It is **Aleatoric Uncertainty**: Since we need to model the process either with Physics or Experiments

What is our environmental condition? Such as Wave load, Humanity, vibration in system, and etc.


It is mostly **Epistemic Uncertainty**.

First Discussion

Please define **Aleatoric** and **Epistemic Uncertainty** in this example? How can we model it?

Uncertainty associated with performance:

Uncertainty associated with Operational Condition:

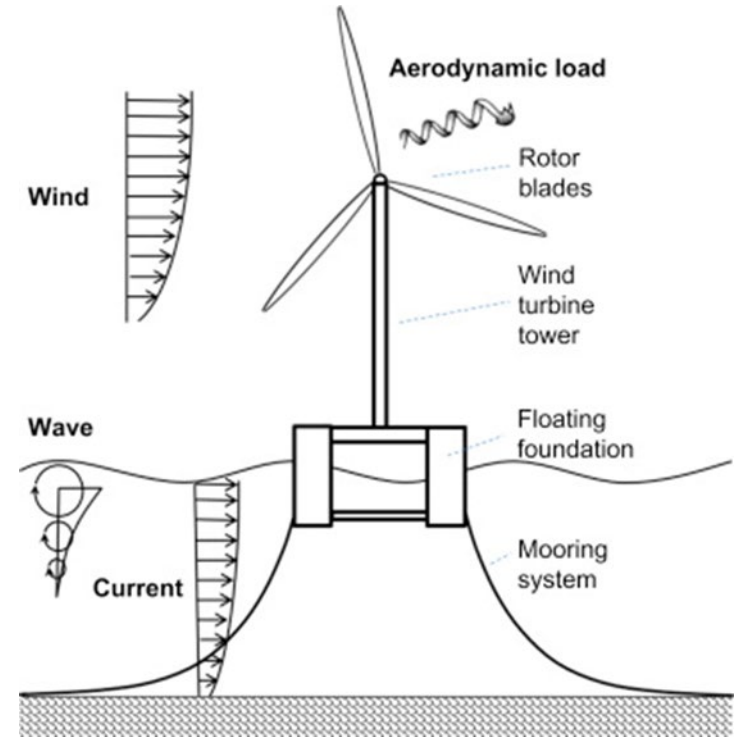




Aalto University
School of Engineering

Approaches for reliability assessment

Reliability assessment


Traditional Approach:

FMEA (Qualitative-Qualitative Approach)
Fault Tree Analysis (FTA) (Quantitative Approach based on Constant Failure Rate)

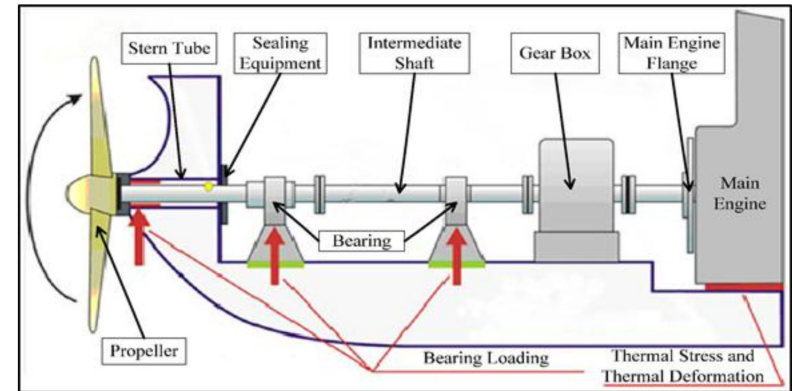

FTA example

An example of **ship propulsion system** failure progress using the application of FTA

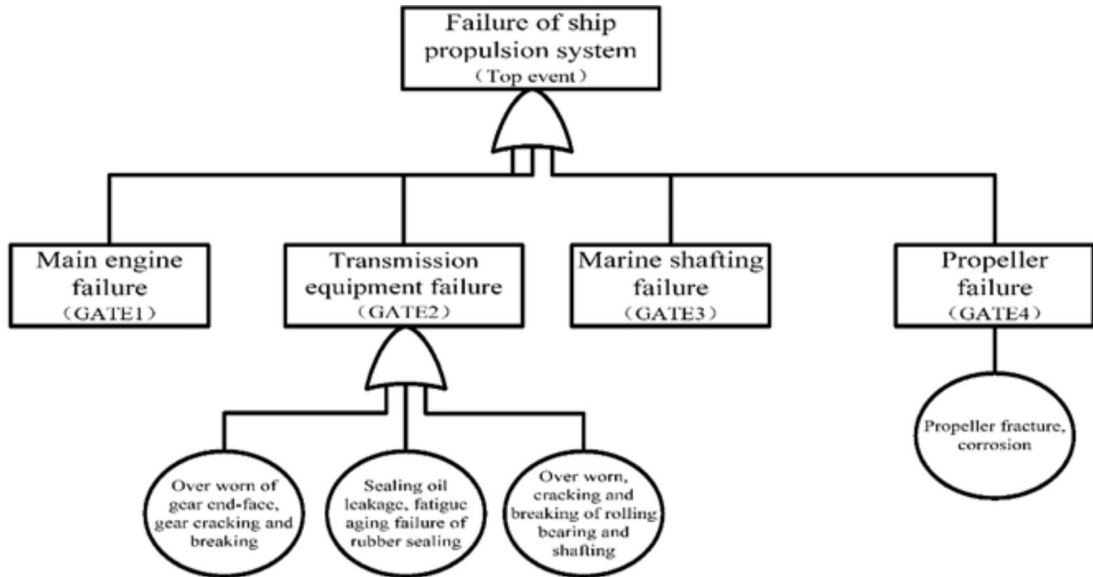

Reliability assessment

Novel and new approach:

Bayesian Network

Machine Learning

- Supervised Learning
- Unsupervised learning
- Reinforcement learning


Deep Learning

Bayesian Network

- Directed Acyclic Graph (DAG); (no directed cycles)
- Nodes represent variables
- Arcs represent conditional dependencies



$$P(X_1, X_2, \dots, X_N) = \prod_i P(X_i | \text{parents}(X_i))$$

$$P(X_1, X_2, X_3, X_4) = P(X_1) P(X_2) P(X_3 | X_1, X_2) P(X_4 | X_3)$$

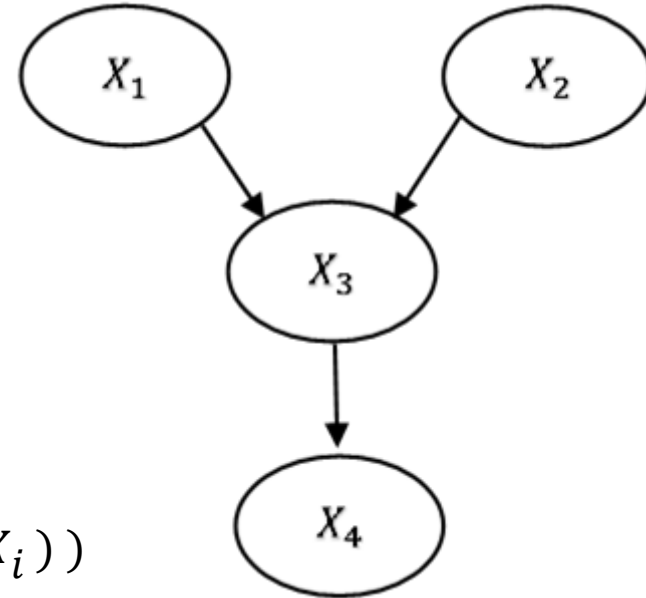


BN example

Mapping FTA into BN

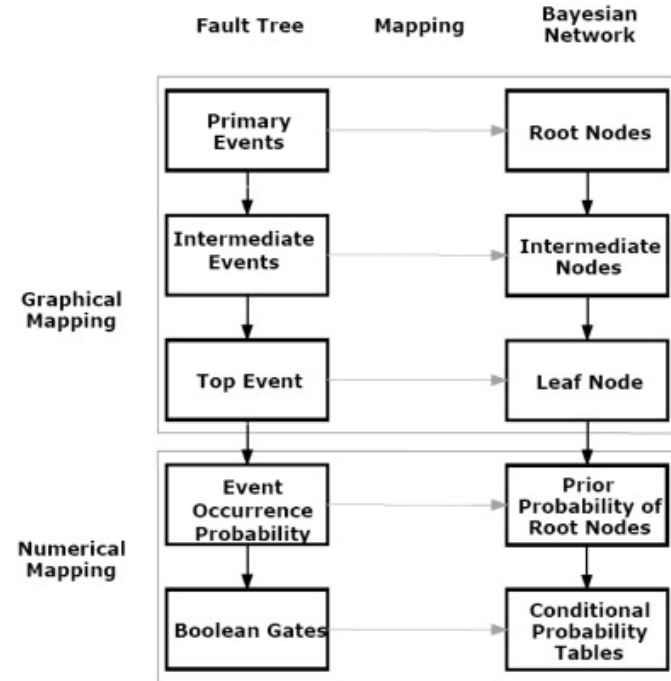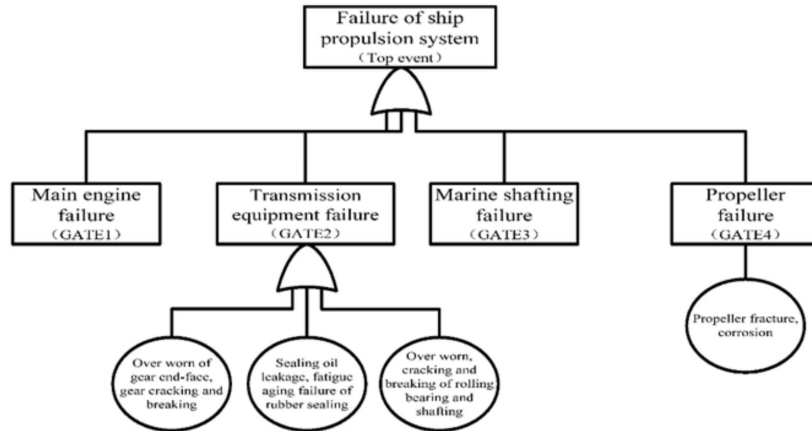

BN example


An example of **ship propulsion system** failure progress using the application of BN

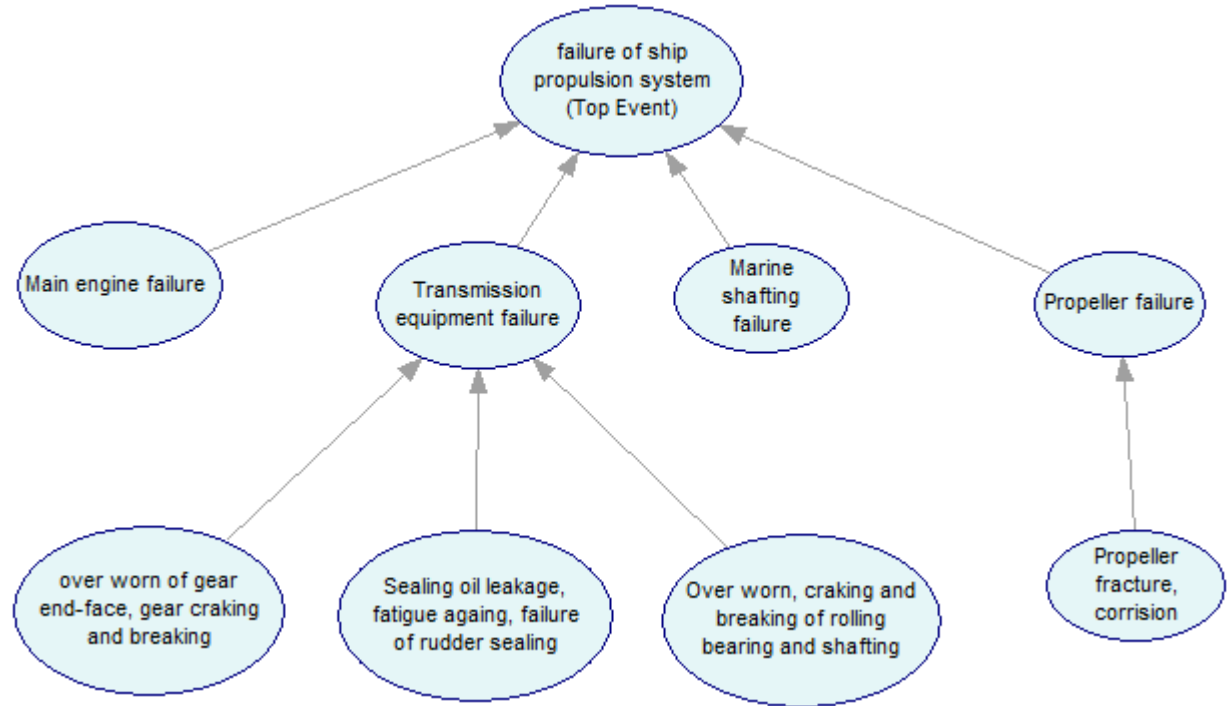

Comparison of FTA and BN

Updating capability; By propagation of new observations through the network, BN updates the prior probabilities, yielding posterior probabilities. Not the case in FTA

When new information about the state/value of any of the node in the network is acquired, BN estimates the updated joint probability distribution based on Bayes' Theorem. Given the evidence that X_3 is in a state/value "e" the joint probability distribution is updated using

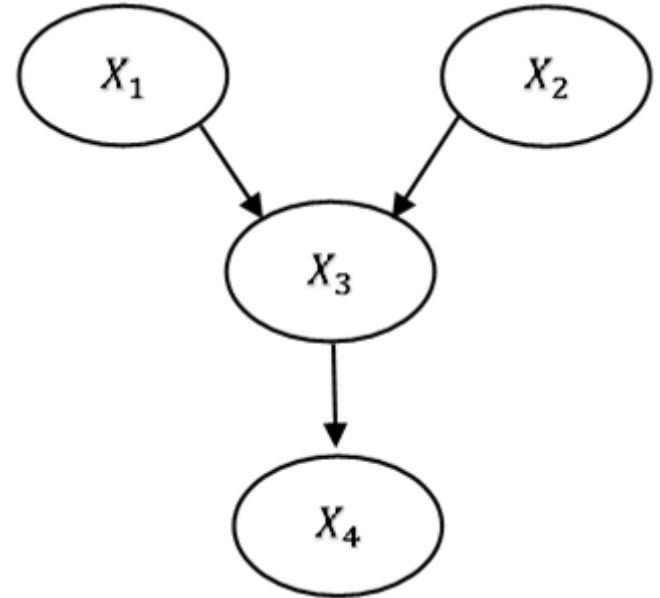


$$P(X_1, X_2, X_4 | e) = \frac{P(X_1, X_2, X_4, e)}{\sum_{X_1, X_2, X_4} P(X_1, X_2, X_4, e)}$$

Comparison of FTA and BN

Both **cause** and **consequence** of an accident can be modeled by BN



Reasoning under uncertainty;

- Through the arcs you can explain the relationship between the variables and reduce the uncertainty. (what type of Uncertainty?)

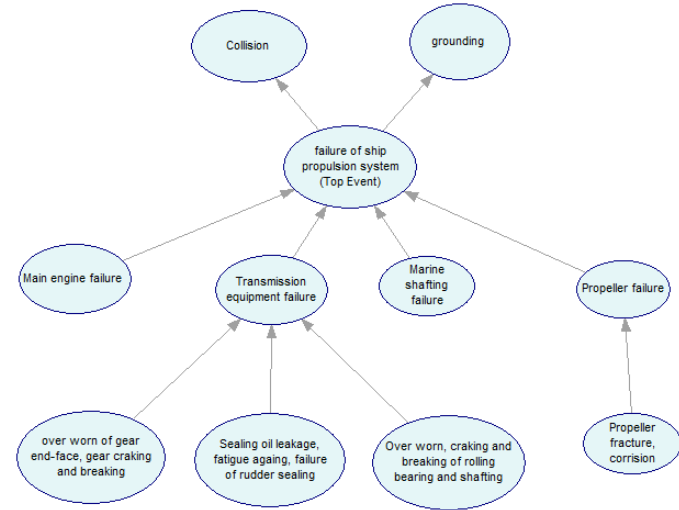

Second Discussion

Does a BN necessarily have an equivalent FT? (Yes, How?/ No, Why?)

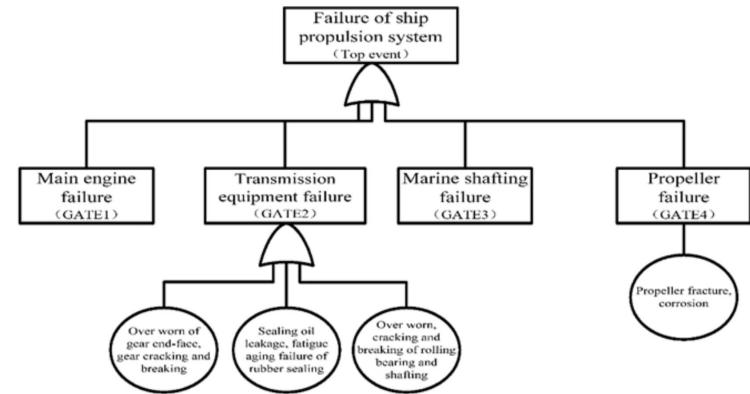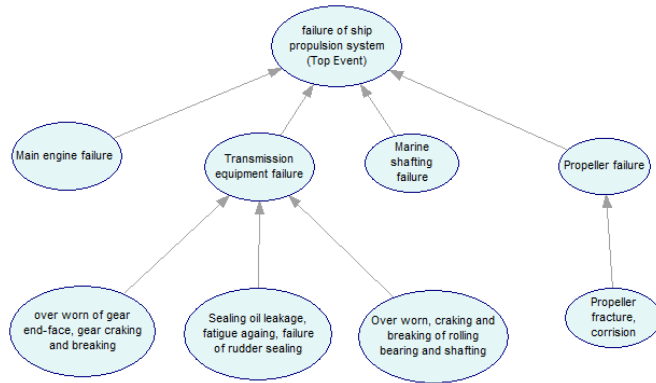



Aalto University
School of Engineering

Structural reliability theory



Structural Reliability



Structural reliability is the ability of a structure or structural element to fulfill the specified performance requirements under the prescribed conditions during the prescribed time.

Prescribed Time

Refers to the design working life; The assumed period for which a structure or structural elements is to be used for its intended purpose without a major repair being necessary.

Structural Reliability Engineering

- Structural failure are very rare, and typically occur due to the occurrence of a rare event
- Structural components and systems are unique, due to choices in materials and geometry, and/or due to operational differences in loading and exposure
- *Hence, no experience-based failure probabilities can be obtained*

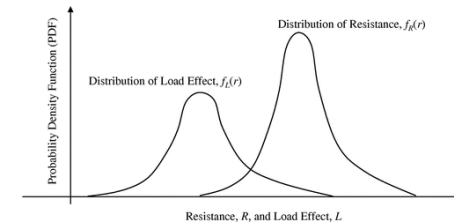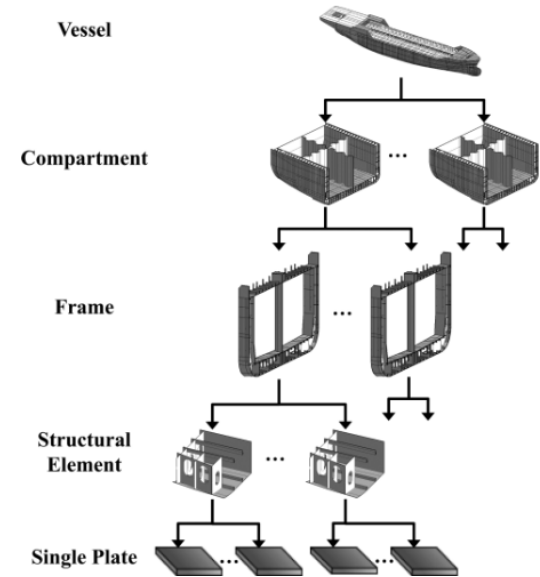

Whole Story about Structural Reliability Engineering (SRE)

Performance of a structure must **Resist (R)** extreme environmental **Load (L)**

SRE define simply as **Limit State Function** or **Failure Function** $g(x)$:

$$g(x) = \text{Resistant} - \text{Load}$$

$g(x) > 0$	<i>Safe</i>
$g(x) < 0$	<i>fail</i>

Structural Reliability Engineering (SRE)

e.g., mooring failure


We want a mooring line that resist 200 KN.
 The wave load is random which can lead to stochastic response in mooring. For example, for a significant wave height of 2 m, the mooring might observe response of 150, 100, 110, 240.

Resistant is equal to 200 KN.

Load are [150, 100, 110, 240]

$$g(x) \begin{cases} 200 - 150 = 50 > 0 \\ 200 - 100 = 100 > 0 \\ 200 - 110 = 90 > 0 \\ 200 - 240 = -40 < 0 \end{cases}$$

Then, Probability of Failure is equal to 1/4

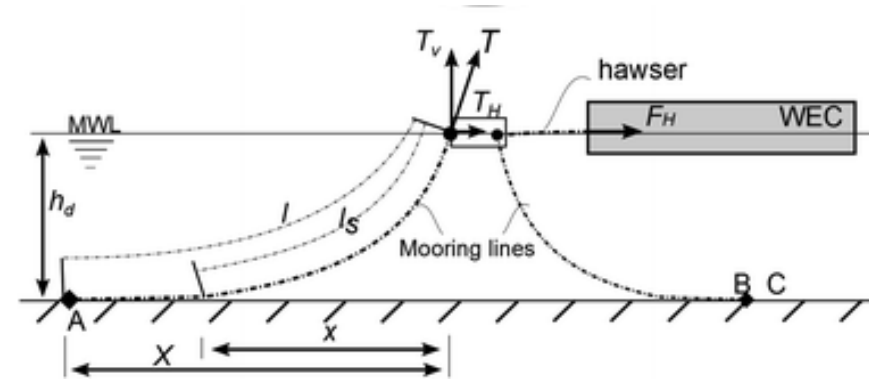



Structural reliability theory

Defining R and L

- The **structural resistance** is calculated based on **theories of structural elements**, if necessary using **Monte Carlo techniques**
- The **load** is often represented by **extreme value distributions**, e.g., **Weibull distribution (Why?)**



Aalto University
School of Engineering

Conclusion of reliability engineering

Conclusions about reliability engineering

- Two types of uncertainties; Epistemic and Aleatoric
- Reliability engineering is a very useful tool to understand the failures on physical measurable phenomena (e.g. structural reliability).
- Probabilistic models for estimation of the statistical characteristics of component failure are highly used* and are common input for risk analysis and assessment.
- Component failure probabilities can be estimated based on failure frequencies from operational experience and material tests.



Aalto University
School of Engineering

Classic accident modelling theories and hazard analysis methods

Hazard, risk and safety

Hazard

Any source of potential damage, harm or adverse health effects on something or someone (2)

Risk

The chance that a person will be harmed or experience an adverse health effect if exposed to a **hazard** (3)

Safety

The condition of being protected from or unlikely to cause danger, **risk**, or injury (4).


Risk and safety management

Risk Management

The identification, evaluation, and prioritization of risks followed by coordinated and economical application of resources to minimize, monitor, and control the impact of unfortunate events (5).

Safety Management


Includes the arrangements made by the organization to establish and promote a strong safety culture while achieving and controlling a determined safety performance (6).

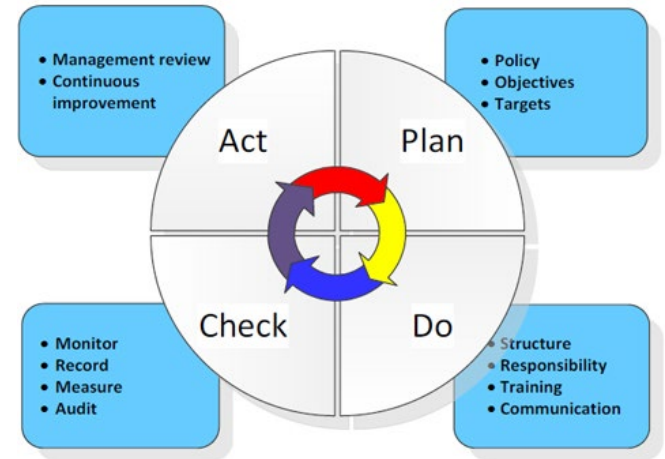

Modelling accident causation as event changes

Accidents are caused by chain of directly related events. We can understand accidents by looking at the chain of events leading to loss


Subjectivity in selecting the events to include, subjectivity in identifying changing conditions, and exclusion of systemic factors.

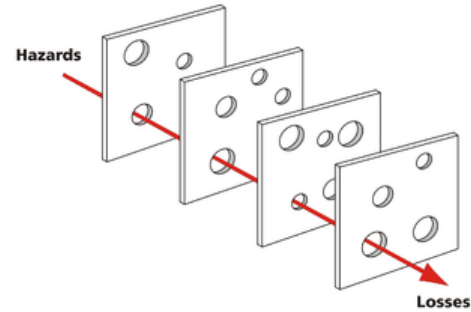

Swiss cheese model by Reason (1990)

Hazard analysis

- For identifying the hazards and analysing the potential causes and effects of hazards, several methods are available.
- Failure Modes and Effect Analysis (FMEA), Hazard and Operability Study (HAZOP), Fault Tree Analysis (FTA) are some of the widely used methods in maritime domain.

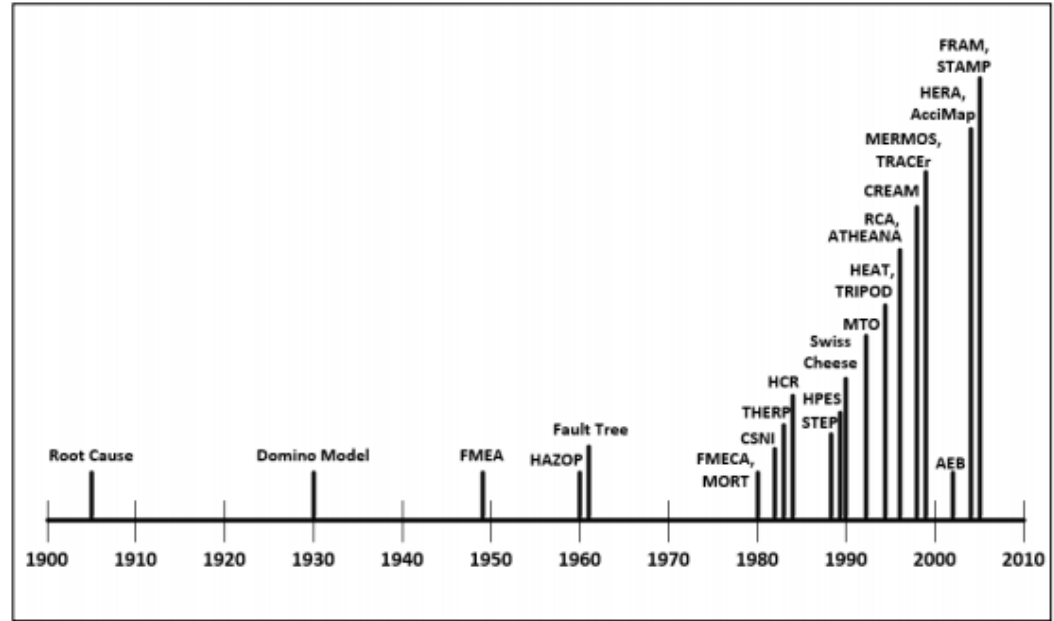

Failure Modes and Effect Analysis (FMEA)

- FMEA is an analysis technique for evaluating the effects of potential failure modes of system components or functions.
- A failure mode is a manner by which a component fails to perform its intended function or the way in which the failure of an item occurs.
- The FMEA worksheet should contain the following information:
 - Component or function of the system
 - Failure mode
 - Effects of failure mode
 - Causes of failure mode
 - Risk of each failure mode
 - Recommendations or safety controls

FMEA procedure

Step1: Define system under assessment.

Define scope and boundary of the system. Identify the system operation, components and functions. Gather all information about system components and its functions.

Step 2: Identify potential failure modes.

For each of the components or functions, identify the potential failure modes.

Step 3: Identify the potential effects.

Identify how the failure mode can affect the component or overall system. In detailed FMEA analysis, the severity level of the failure mode is also defined.

FMEA procedure

Step 4: Identify the potential causes.

Using the system information and brainstorming, identify the potential causes (component failures, human errors, software issues etc) of each failure mode. In detailed FMEA analysis, the probability of occurrence (possibility of occurring) for each failure mode is also defined.

Step 5: Calculate the risk of each failure mode.

Using the severity and probability of occurrence (also detection level if available), calculate the risk of each failure mode.

$$\text{Risk} = \text{Severity} \times \text{Occurrence} \times \text{Detection}$$

Step 6: Define safety controls for each failure mode.

For each failure mode, define the preventive measures to mitigate its causes or effects.

Example FMEA worksheet

Failure Mode Effects Analysis											
System Description: Landing Gear Operation Mode: Flight - Level 2											
Item Number	Item Description	Function	FM. Id.	Failure Mode	Local Effect	Next Higher Effects	End Effects	Sev.	Detection Method	Compensating Provisions	Remarks
1.1.1	Main Pump	Provides pressure when requested by Pilot Command	1	Fails to operate	No effect during this phase	No effect during this phase	No effect	IV	Indication to pilot	None	
			2	Untimely operation	Untimely hydraulic pressure in Main Hydraulic Generation Assembly	Untimely hydraulic pressure from Main Hydraulic Generation Assembly to Actuator Assembly	Untimely extension of Landing Gear	I	Indication to pilot	None	
1.1.2	Check Valve (Main)	Prevents reverse flow	1	Stucked closed	Loss of fluid flow through the Main Generation Assembly check valve	No effect during this phase	No effect	IV	Indication to pilot	None	
			2	Stucked open	Permits fluid flow through the main assy check valve when not required	No effect during this phase	No effect	IV	Undetected	None	

Hazard and Operability study (HAZOP)

- HAZOP, is a technique to identify and prevent the unwanted deviations of system functions.
- The system deviations are identified by combining functional parameters (such as flow, pressure, etc.) of components with predefined guidewords.
- Common guidewords used in HAZOP are:
 - No – Not provided at all
 - More – Provided more than design intent
 - Less – Provided less than design intent
 - As well as – Provided together with another parameter
 - Part of – Provided partly
 - Reverse – Provided opposite or another than intended
 - Other than – Substituted completely by another parameter

HAZOP procedure

Step1: Define system under assessment.

Define scope and boundary of the system. Identify the system operation, components and functions. Gather all information about system components and its functions.

Step 2: Identify functional parameter or design intentions.

For each of the components or functions, identify the functional parameters with which the component was designed for. For example, a pump can include parameters such as flow rate, pressure and start-up/shut-down.

Step 3: Identify the system deviations using guidewords.

By combining the functional parameter and the guidewords, identify the system deviations.

HAZOP procedure

Step 4: Identify the potential effects.

Identify how the system deviation can affect the component or overall system. In detailed HAZOP analysis, the severity level of the failure mode is also defined.

Step 5: Identify the potential causes.

Using the system information and brainstorming, identify the potential causes (component failures, human errors, software issues etc) of each potential deviation. In detailed HAZOP analysis, the probability of occurrence (possibility of occurring) for each failure mode is also defined.

HAZOP procedure

Step 6: Calculate the risk of each system deviation.

Using the severity and probability of occurrence (also detection level if available), calculate the risk of each system deviation.

$$\text{Risk} = \text{Severity} \times \text{Occurrence} (\times \text{Detection})$$

Step 7: Define safety controls for each system deviation.

For each system deviation, define the preventive measures to mitigate its causes and effects.





Example HAZOP worksheet

STUDY TITLE: AUTOMATIC TRAIN PROTECTION SYSTEM									SHEET: 1 of 2	
REFERENCE DRAWING No.: ATP BLOCK DIAGRAM					REVISION No.: 1				DATE:	
TEAM COMPOSITION: DJ, JB, BA									MEETING DATE:	
PART CONSIDERED:				INPUT FROM TRACKSIDE EQUIPMENT						
DESIGN INTENT:				TO PROVIDE SIGNAL TO PES VIA ANTENNAE GIVING INFORMATION ON SAFE SPEEDS AND STOPPING POINTS						
No.	Element	Characteristic	Guide word	Deviation	Possible causes	Consequences	Safeguards	Comments	Actions required	Action allocated to
1	Input signal	Amplitude	NO	No signal detected	Transmitter failure	Considered in separate study of trackside equipment			Review output from trackside equipment study	DJ
2	Input signal	Amplitude	MORE	Greater than design amplitude	Transmitter mounted too close to rail	May damage equipment	Checks to be carried out during installation		Add check to installation procedure	DJ
3	Input signal	Amplitude	LESS	Smaller than design amplitude	Transmitter mounted too far from rail	Signal may be missed	As above		Add check to installation procedure	DJ
4	Input signal	Frequency	OTHER THAN	Different frequency detected	Pick up of a signal from adjacent track	Incorrect value passed to processor	Currently none		Check if action is needed to protect against this	DJ
5	Antennae	Position	OTHER THAN	Antennae is in other than the correct location	Failure of mountings	Could hit track and be destroyed	Cable should provide secondary support		Ensure that cable will keep antennae clear of track	JB
6	Antennae	Voltage	MORE	Greater voltage than expected	Antennae short to live rail	Antennae and other equipment become electrically live			Check if there is any protection against this occurring	DJ



Fault trees analysis (FTA)

- An FT is a logical diagram constructed by deductively developing a specific system failure, through branching intermediate fault events until a primary event is reached.
- A fault tree diagram construction consists of two categories of graphical symbols:
 1. Event symbols
 2. Logic symbols

FTA common events and symbols

Symbol name	Symbol	Description
Basic event		A basic initiating fault or failure event.
Undeveloped event		An event that could have been expanded further into fault tree but was not for the analysis.
Output event		An event that is dependent on the logic of the input events
Conditioning event		A specific condition that can apply to a gate. (only if this condition is met, the output occurs)

FTA common gates and symbols

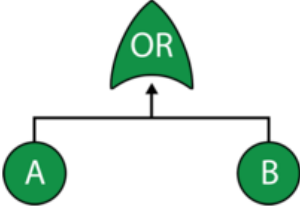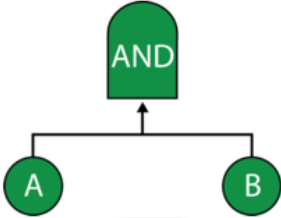Symbol name	Symbol	Description
OR gate		OR gate indicates that the output occurs only if one of the input events occur. Either A or B
AND gate		AND gate indicates that the output occurs only if all of the input events occur. Both A and B

FTA process:

Step1: Define system under assessment.

Define scope and boundary of the system. Identify the system operation, components and functions. Gather all information about system components and its functions.

Step 2: Define the top-level fault to analyse.

Define the top-level fault in system for which the fault tree is to be developed.

Step 3: Identify the combination of events that can lead to the top-level fault .

Identify the causes that can lead to the top-level fault. This should be done by using the symbols of events and gates.

FTA process:


Step 4: Develop the tree further.

Develop the tree further until the root causes are identified or until the desired details are achieved.

Step 5: Define safety controls for the basic events.

For each of the identified basic events, define the preventive measures to mitigate its causes and effects.

Example FTA diagram

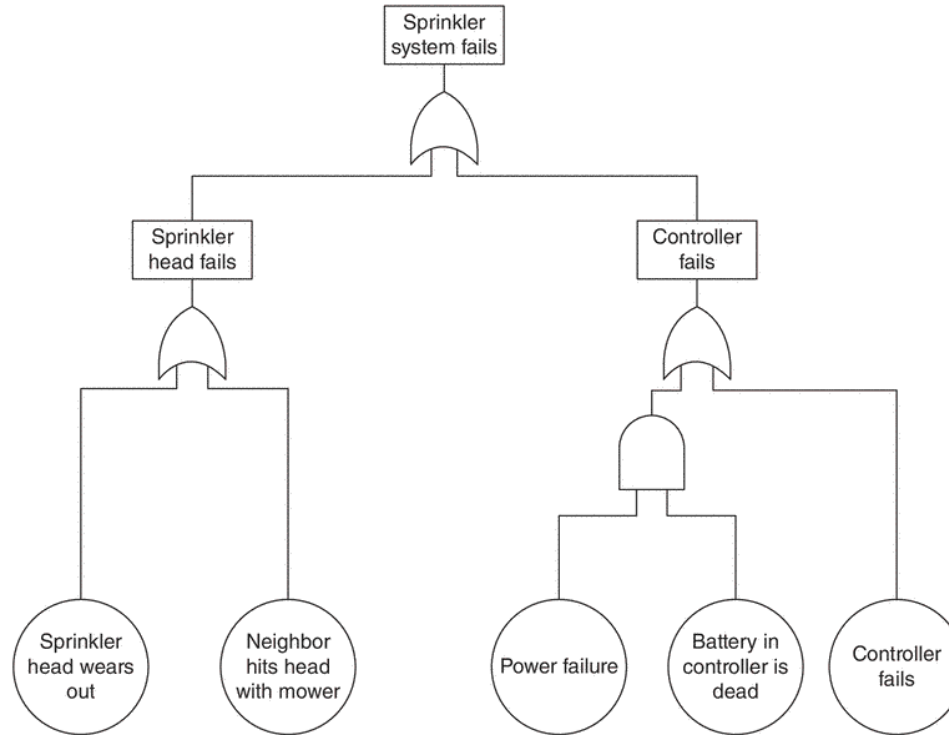

Hazard analysis conclusions

- Several methods for analyzing hazards in system exists.
- The main principle of these methods is to identify the hazards, its effects and its causes.
- In detailed hazard analysis, the risk of each hazards are also calculated, which is determined by defining the severity and probabbility of occurrence.
- The end goal is to define the safety controls to mitigate the effects and causes.



Aalto University
School of Engineering

CA, LL, and FQuiz

Course assignment

Introduction to the course assignment

Learning logs

Please return the second learning log by Sunday 18.09 at 23:59

Time for fast quiz

Instructions:

- The fast quiz is open after the finalization of Lecture 02 (so, now)
- The link to the quiz is:
- <https://link.webropolsurveys.com/S/8E31CE87D1DF5B50>
- The link will close at 14:00
- The grading of the quiz is given before Lecture 03
- If you have any question please let me know



Aalto University
School of Engineering

Thank you

Next lecture more about system safety engineering tools