Climate.now with built environment focus 5 credits

7.5.2023: Carbon budgets, construction materials and emissions

Dr Áróra Árnadóttir



Today's agenda


- Carbon budgets
- Environmental impacts of building materials
 - Concrete
 - Asphalt
 - Steel

Carbon budgets

- Carbon dioxide (CO₂) lasts for long in the atmosphere
 - First 10% goes quickly
 - Next 70% takes centuries to millenia
 - Last 20% takes tens of thousands of years
- As we know that the amount of CO₂ in the atmosphere correlates with climate, we can calculate how much we extra can emit for a certain rise in temperature
 - We influence the natural carbon cycle

Carbon budgets

• Calculated as $E_{FF} + E_{LUC} = G_{ATM} + S_{OCEAN} + S_{LAND} + B_{IM}$

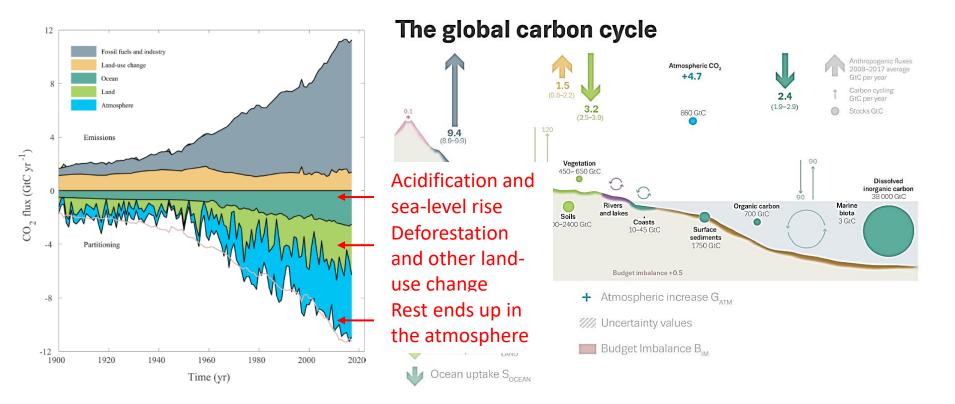



Carbon budgets


- Remaining budget
 - for 1.5°C warming = ~400 GtCO2
 - For 2.0°C warming = ~1000 GtCO2
- 2023 annual emissions 37 GtCO2


Excluding methane and other GHGs

Excluding additional Earth-system feedbacks such as permafrost melting or methane released from wetlands

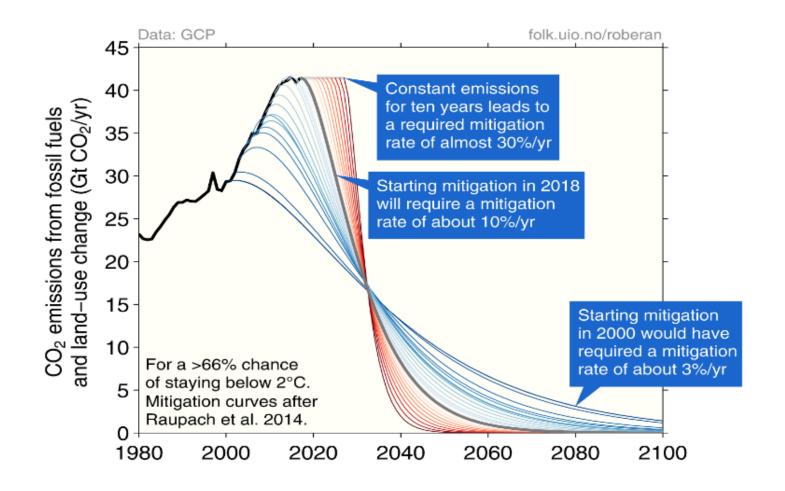

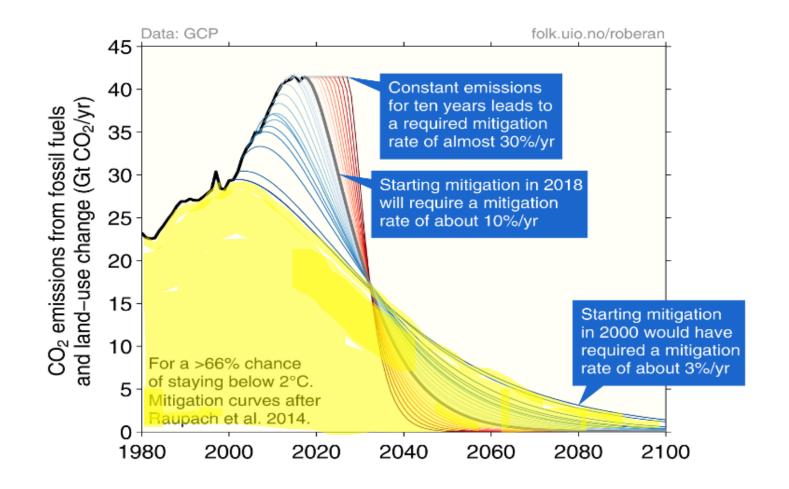


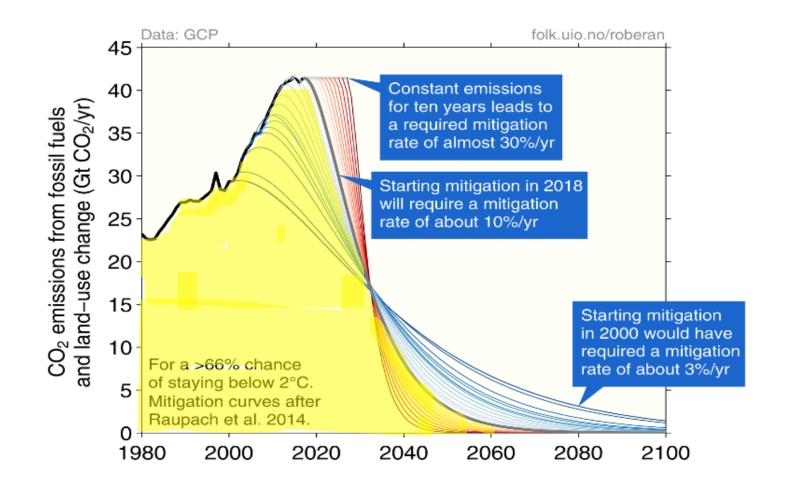

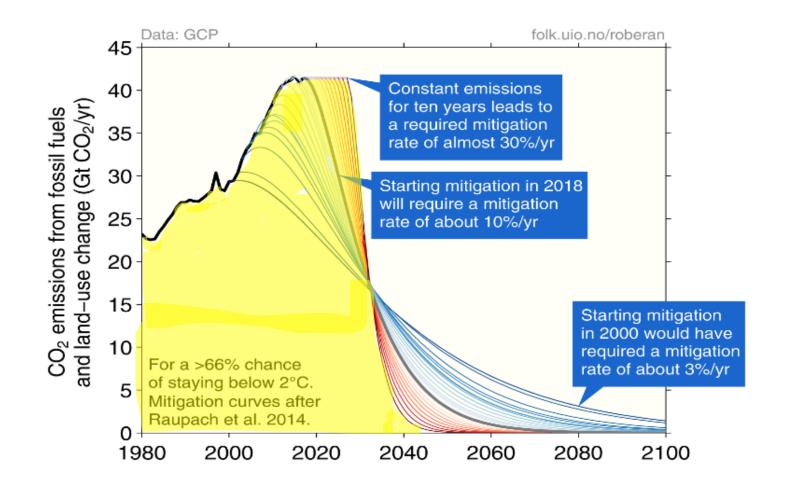


Tipping points


- Do we actually have a quota to keep warming below 1.5° / 2° warming?
- Climate feedbacks could more than double the amount of warming caused by carbon dioxide alone

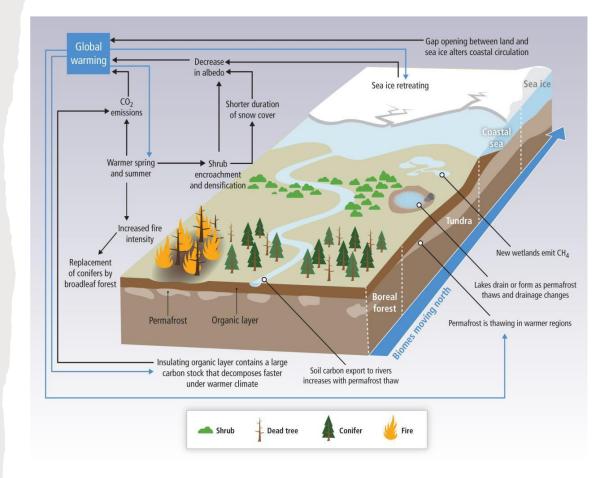

Potential global processes bringing the tipping points closer (or taking us beyond them)

- Permafrost melt
- Ocean acidification reducing the carbon uptake
- Snowcover reduction
- Deforestation
- Watercover darkening
- Snow and icecover darkening
- Erosion




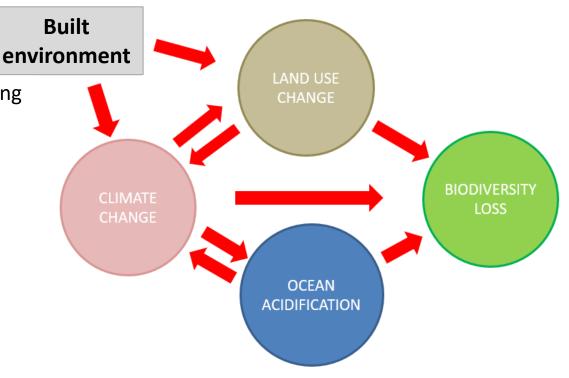

Questions about carbon budgets?

Environmental impact of building materials

- Civil works and building construction consumes 60% of the raw materials extracted from the lithosphere (buildings 24%)
- In Europe, 4.8 tonnes per inhabitant per year
- Building sector accounts for:
 - 36% of total global final energy use
 - 54% of final electricity demand
 - 37% of energy-related CO2 emissions

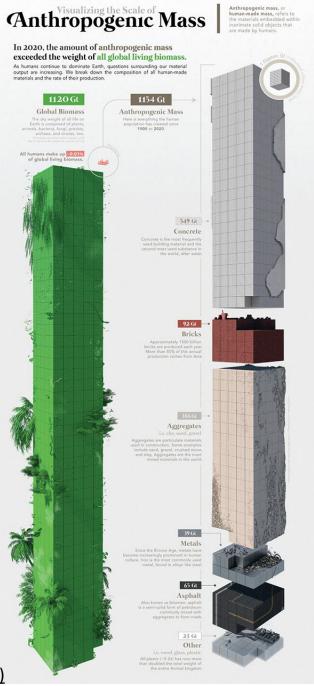

Visualizing the Accumulation of Human-Made Mass on Earth (visualcapitalist.com)

Global load

Concrete and steel responsible for 6.5% and 7.0% of global CO₂ emissions, respectively

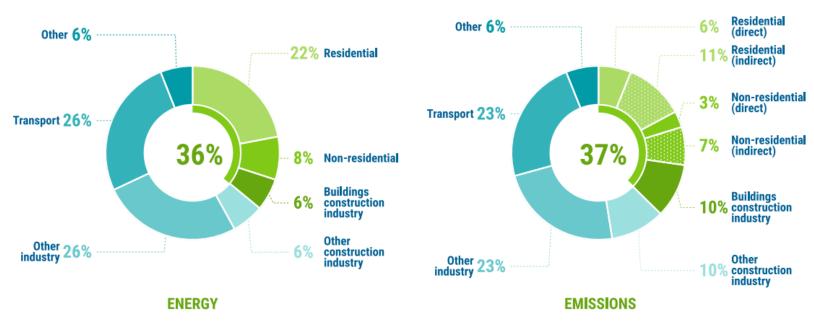


Figure 2. Buildings and construction's share of global final energy and energy-related CO₂ emissions, 2020

United Nations Environment Programme (2021). 2021 Global Status Report for Buildings and Construction: Towards a Zero-emission, Efficient and Resilient Buildings and Construction Sector. Nairobi.

Concrete

- Concrete alone consumes 65% of the total embodied energy of a home
 - Concrete is a mix of cement, water, aggregate and additives
 - Most common building material
 - Portland cement the most common cement in concrete
 - In 2009, the cement industry in the EU responsible for 38.5% of total European CO2 emissions from industry

Asphalt concrete

- Asphalt concrete is a mix of asphalt or "bitumen" and aggregate
- Mainly for road surfaces
- Asphalt obtained from petroleum
 - high pressure and temperatures up to 425 °C required
 - Most common mix requires 165 °C to process asphalt as component in asphalt concrete
 - ...but temperature for mix varies, HMA, WMA, CMA

Steel


- Iron and steel production accounts for ~20% of global final energy use
 - Largest industrial source of CO2 emissions
 - Half is used for construction
- Made from iron ore or scrap
 - 98% of mined iron ore goes into making steel
 - Requires high temperatures
 - Reliance on carbon-based fuels


LCA results differ, one example:

Building product	Density (kg/m3)	Primary energy demand (MJ- Eq/kg)	GWP (kg CO2-Eq/kg)	Water demand (I/kg)	GWP (kg CO2- Eq/m3)
Cement	3150	4.235	0.819	3.937	2580
Reinforced concrete	2546	1.802	0.179	2.768	456
Sawn timber, softwood, planed, air dried	600	18.395	0.267	4.192	160
Glued laminated timber, indoor use	600	27.309	0.541	8.366	325
Reinforced steel	7900	24.336	1.526	26.149	12055
Flat glass	2500	15.511	1.136	77.794	2840

Zabalza Bribián et al. (2011). Life cycle assessment of building materials: Comparative analysis of energy and environmental impacts and evaluation of the eco-efficiency improvement potential. *Building and Environment*, **46**, 1133-1140.

The impact of material replacement





Impact categories	total base case	total scenario 2	Unit	Decrease / Increase	%
Climate change	17,319,130	9,775,484	kg CO2- <u>E</u> q	7,543,646	44%
Ozone depletion	0.86	0.7	kg CFC-11-Eq	0.16	19%
Terrestrial acidification	51,814	39,685	SO2-Eq	12,129	23%
Freshwater eutrophication	3,810	3,156	kg P-Eq	654	17%
Photochemical oxidant formation	62,104	49,921	kg NMVOC	12,183	20%
Freshwater ecotoxicity	259,620	210,250	kg 1,4-DCB-Eq	49,370	19%
Human toxicity	3,734,476	3,057,572	kg 1,4-DCB-Eq	676,904	18%
Particulate matter formation	28,915	21,555	kg PM10-Eq	7,360	25%
Agricultural land occupation	481,906	74,595,042	m2a	74,113,136	15379%
Water depletion	216,317	74,099	m3	142,218	66%
Ionising radiation	646,404	721,513	kg U235-Eq	75,109	12%
Fossil depletion	3,320,639	2,554,296	kg oil-Eq	766,343	23%
Marine ecotoxicity	244,212	198,328	kg 1,4-DCB-Eq	45,884	19%
Marine eutrophication	155	129	kg N-Eq	26	17%
Metal depletion	4,068,833	3,416,525	kg Fe-Eq	652,308	16%
Natural land transform	4,765	3,372	m2	1,393	29%
Terrestrial ecotoxicity	1,298	2,154	kg 1,4-DCB-Eq	856	66%
Urban land occupation	780,777	1,231,060	m2a	450,282	58%

Not even taking sequestration potential into account

Transport

- The environmental impact of building materials differs depending on transport method
- Primary energy demand (MJ-Eq/km) of transporting 1 tonne of materials is...
 - 3.266 by road
 - 0.751 by rail
 - 0.170 by ship


Weight, location and fuel source matter!

Future scenarios

- Possible for a sustainable future scenario to rely on these highly unnatural high-impact materials?
- Durability
 - How long do they actually need to last?
 - The Icelandic turf house
 - Repair and reuse
 - Evolved with household composition
- End of life
 - They don't dissolve naturally

The cement industry reacting, but too late?

- Norcem
 - CCS to be used in production by 2030

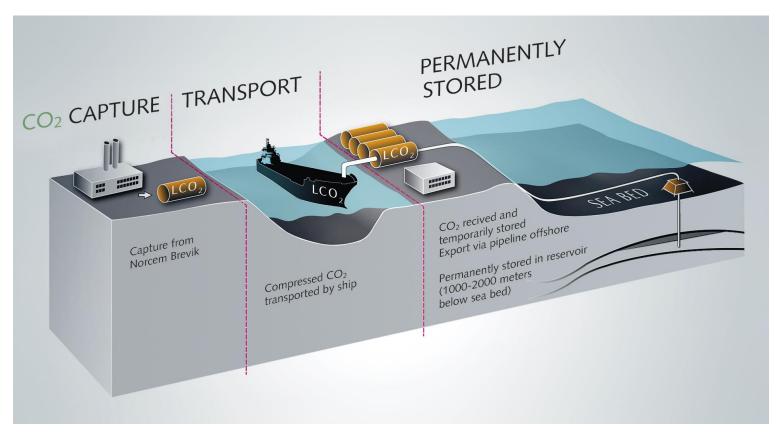

Examples of more sustainable materials, available now

- Mycelium
- Hempcrete
- Biocrete
- Biocement
- CLT and other timber and bamboo products

Mycelium



Hempcrete





Biocrete



https://www.biocrete.no/

Biocement




https://biocement.com/


CLT




And in general vernacular architecture...

- Use of local resources
- Buildings responsive to local climate
- Less energy-intensive manufacturing
- E.g. Clay, straw, earth, snow, turf, wood

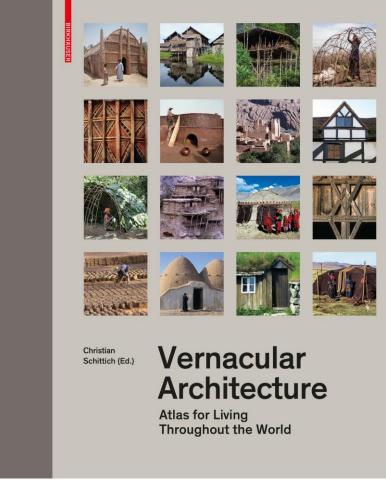


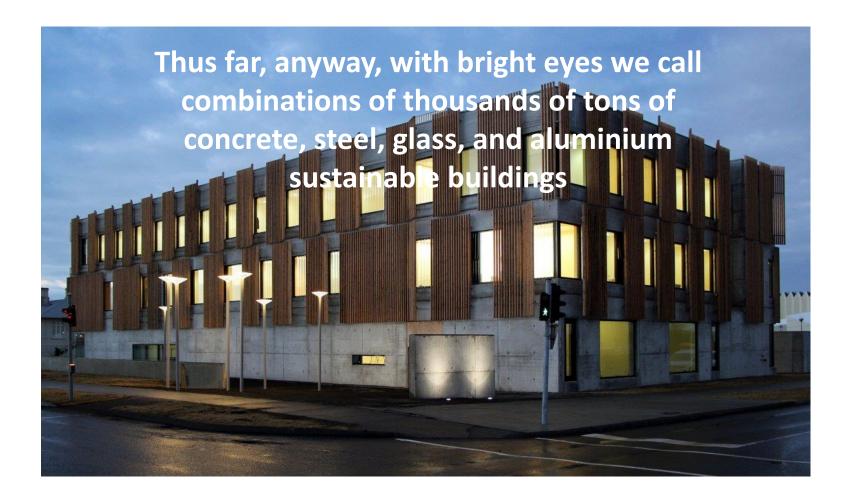

BREEAM vs non-certified

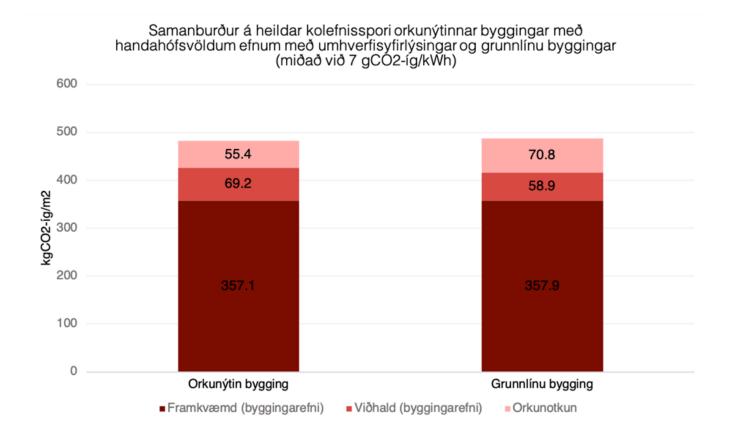

BREEAM vs non-certified

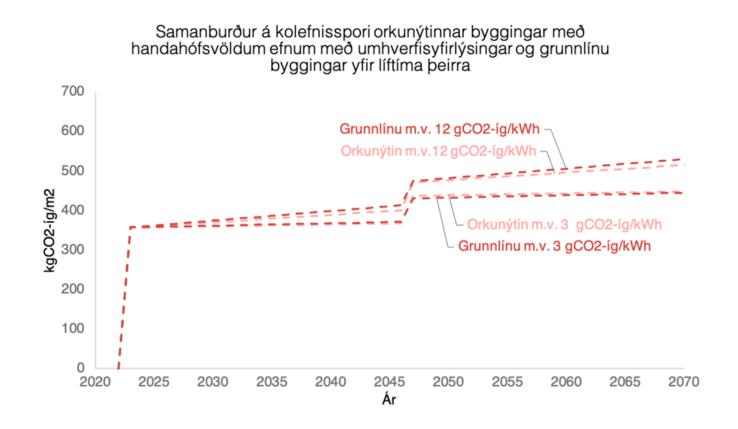


To give a bit of perspective for the importance of the issue:

Poorer countries catching up with Western infrastructure stocks, using current technologies, would cause approximately 350 Gt CO2 from materials production (Müller et al.), which roughly equals the TOTAL carbon budget available for 1.5 degrees warming





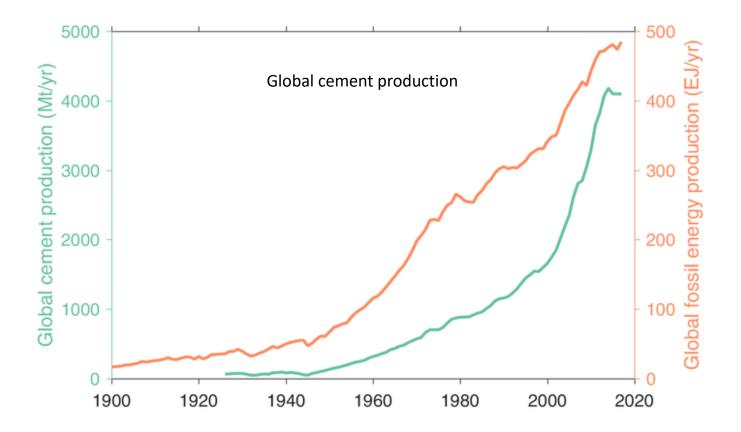



Next lectures

16.5.	Building LCA and green building certificates	T2	Ali Amiri
23.5.	Circular construction	Online	Katarzyna Jagozinska
30.5.	Carbon storing potential of the built environment	T2	Ali Amiri

Calculation estimate example from Iceland

- 35.000 apartments in the next 10 years
- Average size 100m2
- Typical emissions per m2 are 500kg
- 35.000 * 100 * 0,5 tonns = 1.75 million
- Annual national CO2 emissions= 3.5 million tonns